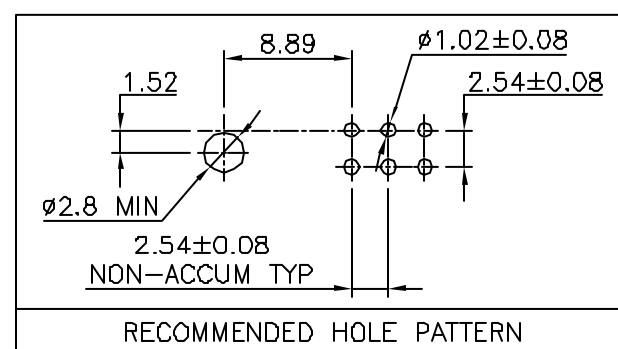
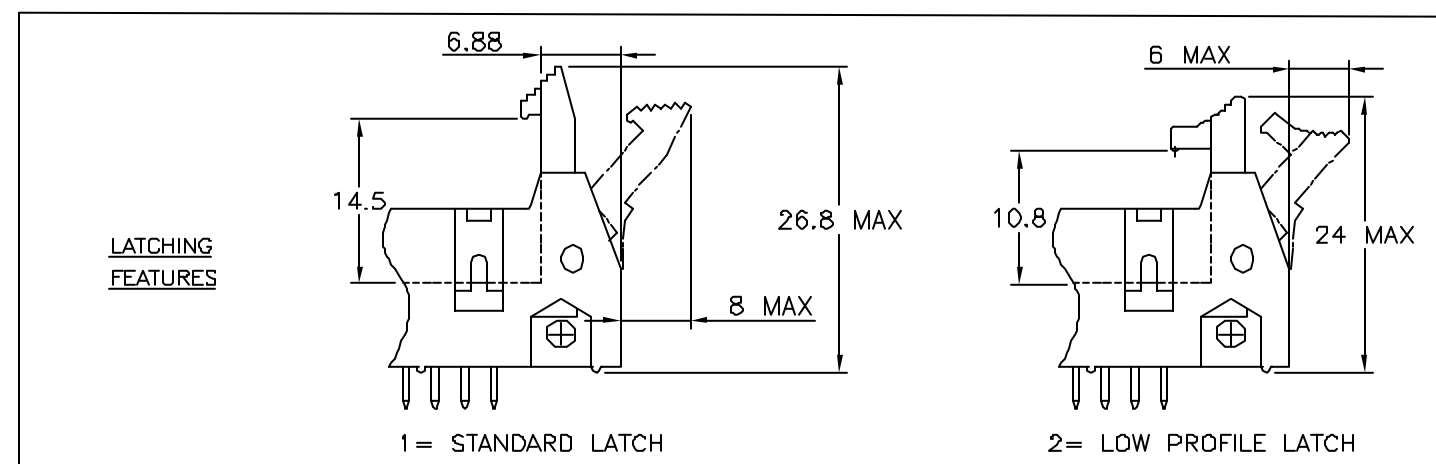
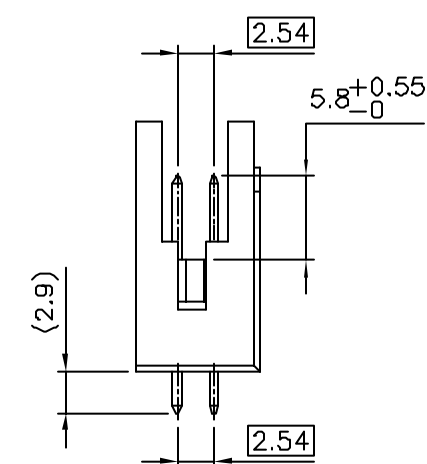
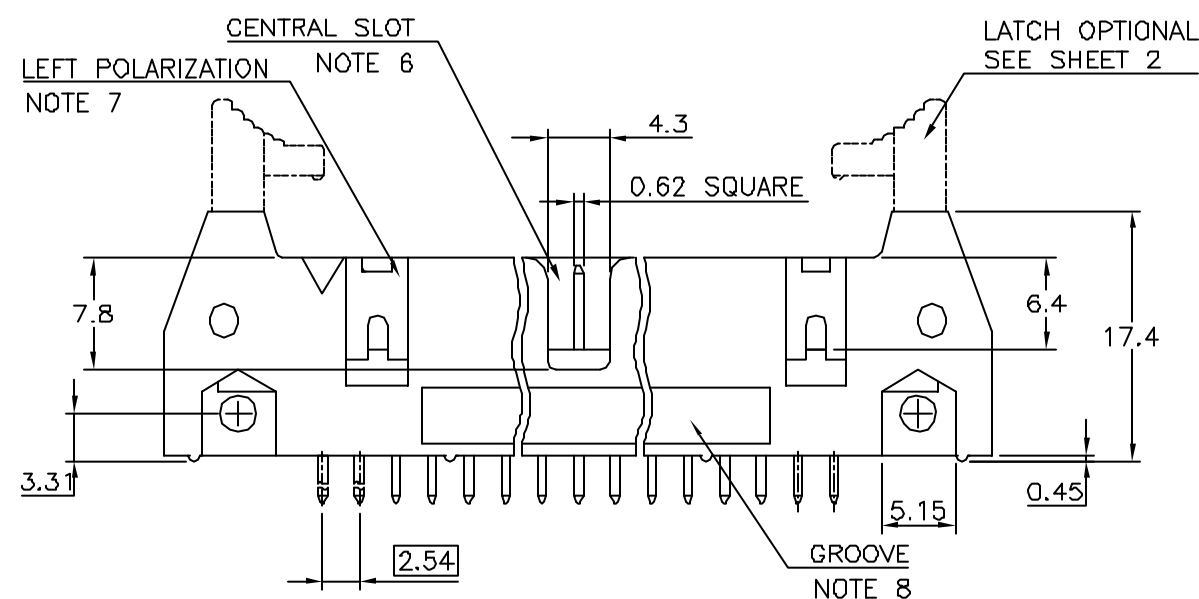
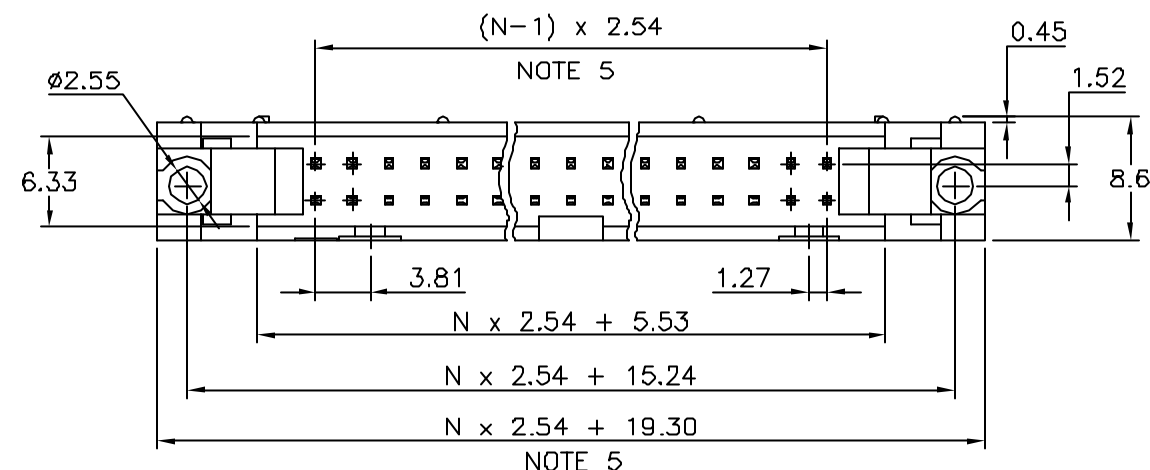


LATCHING _____
 0= WITHOUT LATCH
 1= STANDARD LATCH
 2= LOW PROFILE LATCH

PIN STYLE	SIZE
06	2x3
08	2x4
10	2x5
14	2x7
16	2x8
18	2x9
20	2x10
26	2x13
30	2x15
34	2x17
40	2x20
44	2x22
50	2x25
60	2x30
64	2x32

PLATING :
0.05 μ m Au FULL PLATED
OVER 1.27 μ m Ni MIN

- 1 – HOUSING MAT'L : GLASS FILLED
THERMOPLASTIC. UL94V-0 COLOR: GREY
- 2 – PIN MATERIAL : BRASS
- 3 – PRODUCT PACKAGED IN TUBES
- 4 – 40N MIN LATCH RETENTION FORCE
AT FIRST EXTRACTION
- 5 – TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- 6 – NO CENTRAL SLOT ON POSITIONS 6 & 8
- 7 – NO LEFT POLARIZATION ON POSITIONS 06, 08, 10, 14.
- 8 – NO GROOVE ON POSITIONS 06, 08, 10, 14, 30, 34
- 9 – RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a – PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.
 - b – MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C ±5°C SOLDER BATH TEMPERATURE FOR
5 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - c – LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d – LEGAL STATEMENT: SEE GS-22-008.

[illegible]