


High Temperature MLCC – 250°C Rated

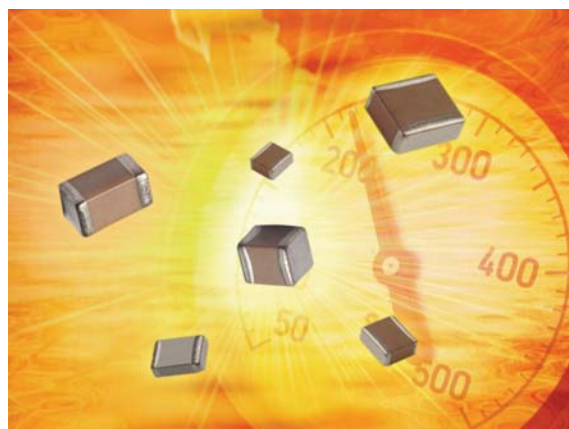

Present military specifications, as well as a majority of commercial applications, require a maximum operating temperature of 125°C. However, the emerging market for high temperature electronics demands capacitors operating reliably at temperatures beyond 125°C. AVX's new high temperature chip capacitor product line, with verified capability of long-term operation up to 250°C is a response to both military and commercial business needs. The new capacitors demonstrate high current handling capabilities, high volumetric efficiency, high insulation resistance and low ESR/ESL. This product has been designed for the most demanding applications, such as "down-hole" oil exploration and aerospace programs.

HOW TO ORDER

AT10	3	T	104	K	A	T	2	A
AVX Style	Voltage Code	Temperature Coefficient	Capacitance Code (2 significant digits + no. of zeros)	Capacitance Tolerance	Test Level	Termination*	Packaging	Special Code
AT06 = 1206 AT10 = 1210 AT12 = 1812 AT14 = 2225	16V = Y 25V = 3	COG = A VHT = T (Class II)	101 = 100pF 102 = 1nF 103 = 10nF 104 = 100nF 105 = 1µF	J = ±5% K = ±10% M = ±20%	A = Standard	1 = Pd/Ag T = 100% Sn Plated (RoHS Compliant)	2 = 7" Reel 4 = 13" Reel 9 = Bulk	A = Standard
*Voltage rating specified at 250°C								

ELECTRICAL SPECIFICATIONS

Temperature Coefficient

COG: A 0±30 ppm/°C, -55°C to +250°C

VHT: T ±15%, -55°C to +150°C

See TCC Plot for +250°C

Capacitance Test (MIL-STD-202, Method 305)

25°C, 1.0 ± 0.2 Vrms (open circuit voltage) @ 1kHz

Dissipation factor 25°C

COG: 0.15% Max at 1.0 ± 0.2 Vrms (open circuit voltage) @ 1kHz

VHT: 2.5% Max at 1.0 ± 0.2 Vrms (open circuit voltage) @ 1kHz

Insulation Resistance 25°C (MIL-STD-202, Method 302)

100GΩ or 1000MΩ.µF (whichever is less)

Insulation Resistance 125°C (MIL-STD-202, Method 302)

10GΩ or 100MΩ.µF (whichever is less)

Insulation Resistance 200°C (MIL-STD-202, Method 302)

1GΩ or 10MΩ.µF (whichever is less)


Insulation Resistance 250°C (MIL-STD-202, Method 302)

100MΩ or 1MΩ.µF (whichever is less)

Direct Withstanding Voltage 25°C (Flash Test)

250% rated voltage for 5 seconds with 50mA max charging current (500 Volt units @ 750VDC)

DIMENSIONS




millimeters (inches)


Size	1206	1210	1812	2225
(L) Length	3.20 ± 0.20 (0.126 ± 0.008)	3.20 ± 0.20 (0.126 ± 0.008)	4.50 ± 0.30 (0.177 ± 0.012)	5.72 ± 0.25 (0.225 ± 0.010)
(W) Width	1.60 ± 0.20 (0.063 ± 0.008)	2.50 ± 0.20 (0.098 ± 0.008)	3.20 ± 0.20 (0.126 ± 0.008)	6.35 ± 0.25 (0.250 ± 0.010)
(T) Thickness Max.	1.52 (0.060)	1.70 (0.067)	2.54 (0.100)	2.54 (0.100)
(t) terminal min. max.	0.25 (0.010) 0.75 (0.030)	0.25 (0.010) 0.75 (0.030)	0.25 (0.010) 1.02 (0.040)	0.25 (0.010) 1.02 (0.040)

PERFORMANCE CHARACTERISTICS


Typical Temperature Coefficient of Capacitance (VHT Dielectric)

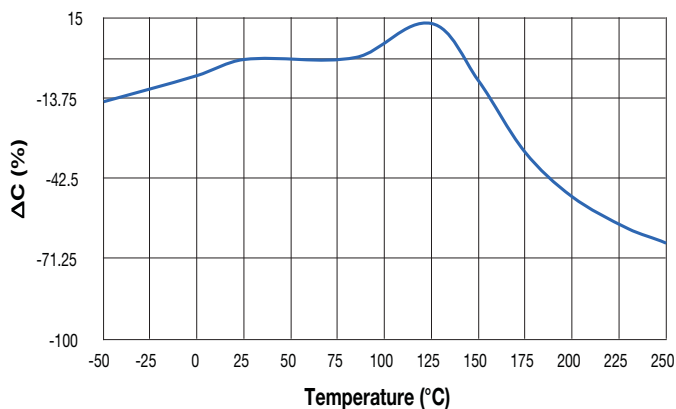


Typical Temperature Coefficient of Capacitance (C0G Dielectric)

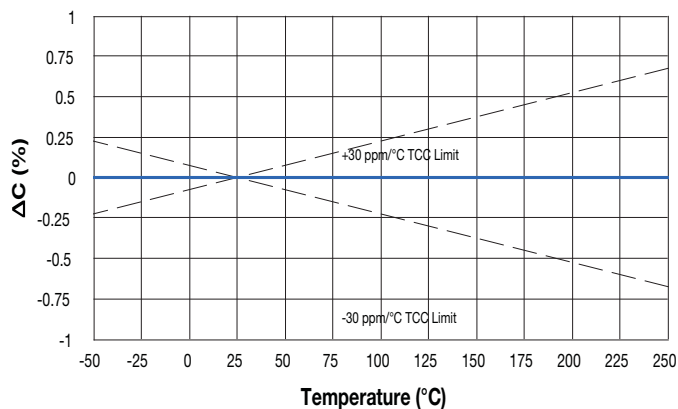


Typical Voltage Coefficient of Capacitance (VHT Dielectric)

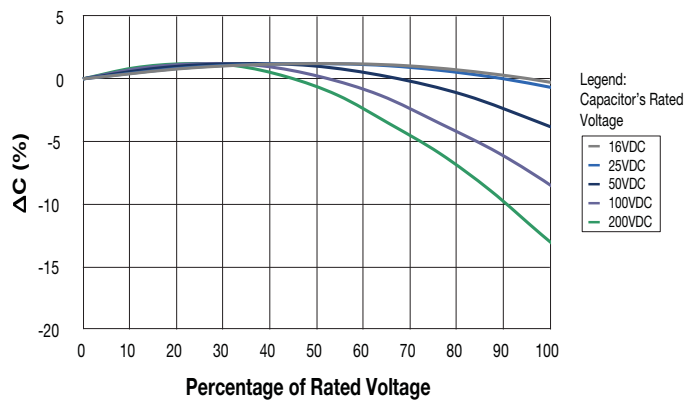


Typical Voltage Coefficient of Capacitance (C0G Dielectric)

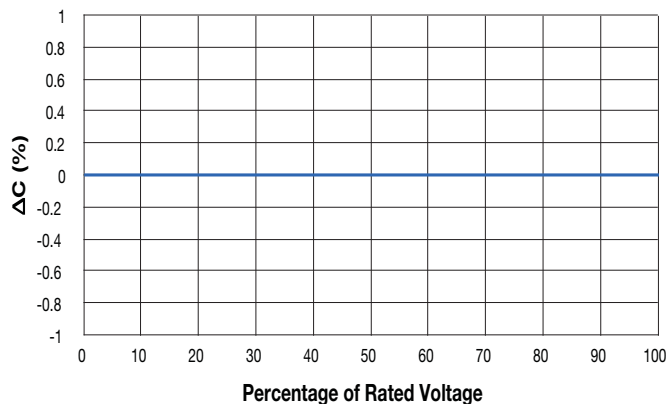

RC vs Temperature (VHT Dielectric)

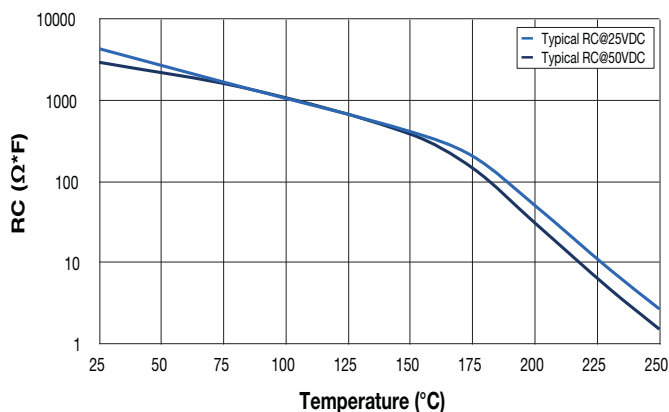


RC vs Temperature (C0G Dielectric)

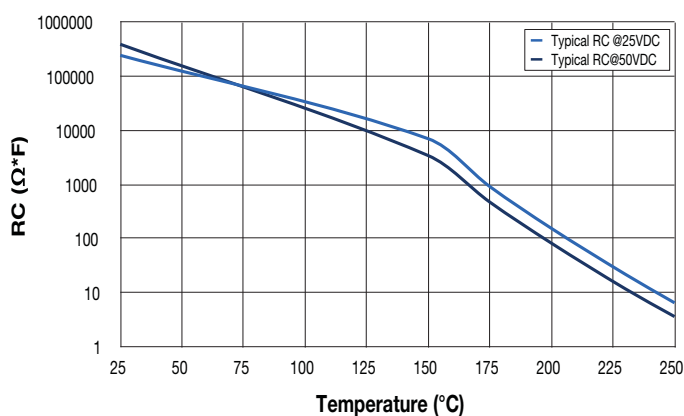


RELIABILITY

250°C Life Test @ 2x Rated Voltage (VHT Dielectric)

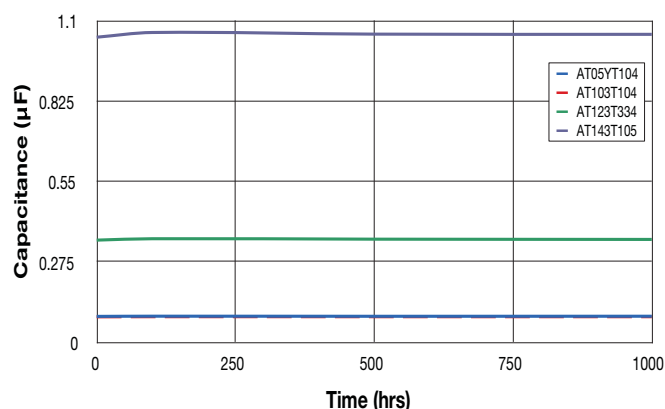

250°C Life Test @ 2x Rated Voltage (C0G Dielectric)

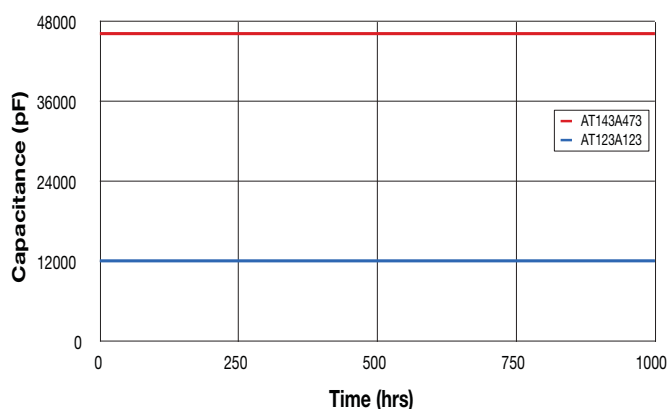

VAT - Failure Rate @ 90% Confidence Level (%/1000 hours)		
Temperature (°C)	50% Rated Voltage	100% Rated Voltage
200	0.002	0.017
250	0.026	0.210


*Typical 1210, 1812, 2225 Failure Rate Analysis based on 250°C testing and voltage ratings specified on the following page.

C0G - Failure Rate @ 90% Confidence Level (%/1000 hours)		
Temperature (°C)	50% Rated Voltage	100% Rated Voltage
200	0.006	0.047
250	0.074	0.590


*Typical 1812 and 2225 Failure Rate Analysis based on 250°C testing and voltage ratings specified on the following page.

FREQUENCY RESPONSE


Impedance Frequency Response (VHT Dielectric)

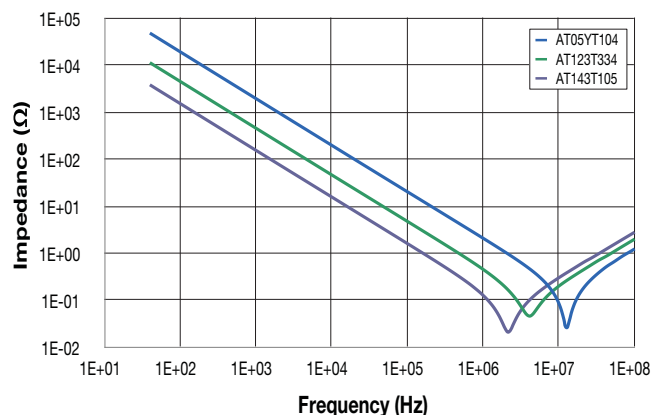


ESR Frequency Response (VHT Dielectric)

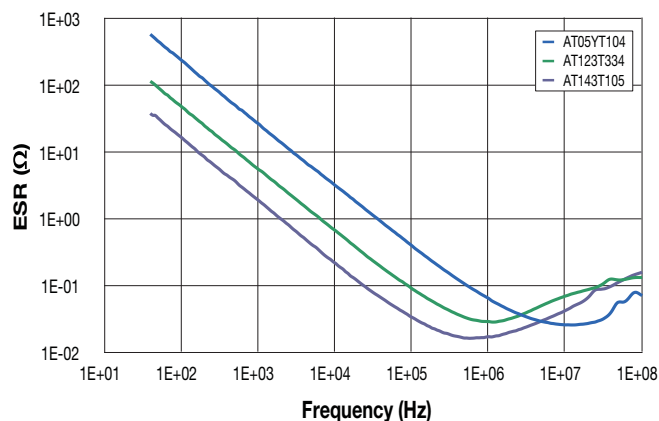

Impedance Frequency Response (C0G Dielectric)

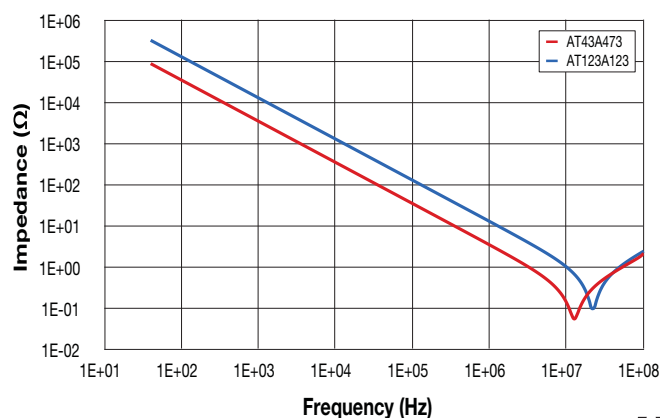

ESR Frequency Response (C0G Dielectric)

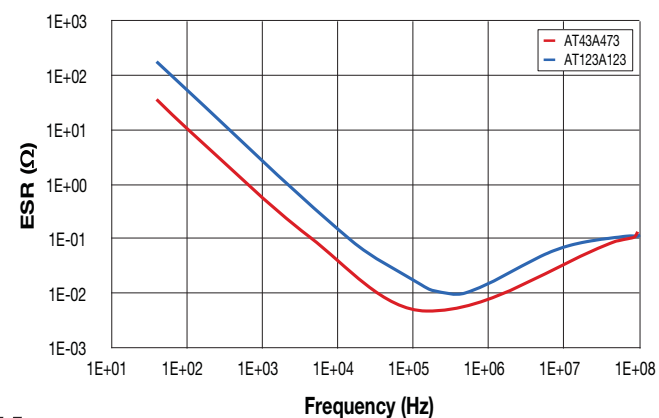

PREFERRED SIZES ARE SHADED

VHT

Case Size		1206	1210	1812	2225
Soldering		Reflow/Wave	Reflow Only	Reflow Only	Reflow Only
(L) Length	mm (in.)	3.20 ± 0.20 (0.126 ± 0.008)	3.20 ± 0.20 (0.126 ± 0.008)	4.50 ± 0.30 (0.177 ± 0.012)	2.75 ± 0.25 (0.225 ± 0.010)
(W) Width	mm (in.)	1.60 ± 0.20 (0.063 ± 0.008)	2.50 ± 0.20 (0.098 ± 0.008)	3.20 ± 0.20 (0.126 ± 0.008)	6.35 ± 0.25 (0.250 ± 0.010)
(T) Thickness	mm (in.)	1.52 (0.060)	1.70 (0.067)	2.54 (0.100)	2.54 (0.100)
(t) Terminal	min max	0.25 (0.010) 0.75 (0.030)	0.25 (0.010) 0.75 (0.030)	0.25 (0.010) 1.02 (0.040)	0.25 (0.010) 1.02 (0.040)
Voltage (V)		16	25	25	25
Cap (pF)					
	1000				
	1200				
	1500				
	1800				
	2200				
	2700				
	3300				
	3900				
	4700				
	5600				
	6800				
	8200				
	10000				
	12000				
	15000				
	18000				
	22000				
	27000				
	33000				
	39000				
	47000				
	56000				
	68000				
	82000				
	100000				
	120000				
	150000				
	180000				
	220000				
	270000				
	330000				
	390000				
	470000				
	560000				
	680000				
	820000				
	1000000				
	1200000				
	1500000				
	1800000				
	2200000				
	2700000				
	3300000				
	3900000				
	4700000				
	5600000				
	6800000				
	8200000				
	10000000				
	12000000				
	15000000				
	18000000				
	22000000				
	27000000				
	33000000				
	39000000				
	47000000				
	56000000				
	68000000				
	82000000				
	100000000				
	120000000				
	150000000				
	180000000				
	220000000				
	270000000				
	330000000				
	390000000				
	470000000				
	560000000				
	680000000				
	820000000				
	1000000000				
	1200000000				
	1500000000				
	1800000000				
	2200000000				
	2700000000				
	3300000000				
	3900000000				
	4700000000				
	5600000000				
	6800000000				
	8200000000				
	10000000000				
	12000000000				
	15000000000				
	18000000000				
	22000000000				
	27000000000				
	33000000000				
	39000000000				
	47000000000				
	56000000000				
	68000000000				
	82000000000				
	100000000000				
	120000000000				
	150000000000				
	180000000000				
	220000000000				
	270000000000				
	330000000000				
	390000000000				
	470000000000				
	560000000000				
	680000000000				
	820000000000				
	1000000000000				
	1200000000000				
	1500000000000				
	1800000000000				
	2200000000000				
	2700000000000				
	3300000000000				
	3900000000000				
	4700000000000				
	5600000000000				
	6800000000000				
	8200000000000				
	10000000000000				
	12000000000000				
	15000000000000				
	18000000000000				
	22000000000000				
	27000000000000				
	33000000000000				
	39000000000000				
	47000000000000				
	56000000000000				
	68000000000000				
	82000000000000				
	100000000000000				
	120000000000000				
	150000000000000				
	180000000000000				
	220000000000000				
	270000000000000				
	330000000000000				
	390000000000000				
	470000000000000				
	560000000000000				
	680000000000000				
	820000000000000				
	1000000000000000				
	1200000000000000				
	1500000000000000				
	1800000000000000				
	2200000000000000				
	2700000000000000				
	3300000000000000				
	3900000000000000				
	4700000000000000				
	5600000000000000				
	6800000000000000				
	8200000000000000				
	10000000000000000				
	12000000000000000				
	15000000000000000				
	18000000000000000				
	22000000000000000				
	27000000000000000				
	33000000000000000				
	39000000000000000				
	47000000000000000				
	56000000000000000				
	68000000000000000				
	82000000000000000				
	100000000000000000				
	120000000000000000				
	150000000000000000				
	180000000000000000				
	220000000000000000				
	270000000000000000				
	330000000000000000				
	390000000000000000				
	470000000000000000				
	560000000000000000				
	680000000000000000				
	820000000000000000				
	1000000000000000000				
	1200000000000000000				
	1500000000000000000				
	1800000000000000000				
	2200000000000000000				
	2700000000000000000				
	3300000000000000000				
	3900000000000000000				
	4700000000000000000				
	5600000000000000000				
	6800000000000000000				
	8200000000000000000				
	10000000000000000000				
	12000000000000000000				
	15000000000000000000				
	18000000000000000000				
	22000000000000000000				
	27000000000000000000				
	33000000000000000000				
	39000000000000000000				
	47000000000000000000				
	56000000000000000000				
	68000000000000000000				
	82000000000000000000				
	100000000000000000000				
	120000000000000000000				
	150000000000000000000				
	180000000000000000000				
	220000000000000000000				
	270000000000000000000				
	330000000000000000000				
	390000000000000000000				
	470000000000000000000				
	560000000000000000000				
	680000000000000000000				
	820000000000000000000				
	1000000000000000000000				
	1200000000000000000000				
	1500000000000000000000				
	1800000000000000000000				
	2200000000000000000000				
	2700000000000000000000				
	3300000000000000000000				
	3900000000000000000000				
	4700000000000000000000				
	5600000000000000000000				
	6800000000000000000000				
	8200000000000000000000				
	10000000000000000000000				
	12000000000000000000000				
	15000000000000000000000				
	18000000000000000000000				
	22000000000000000000000				
	27000000000000000000000				
	33000000000000000000000				
	39000000000000000000000				
	47000000000000000000000				
	56000000000000000000000				
	68000000000000000000000				
	82000000000000000000000				
	100000000000000000000000				
	120000000000000000000000				
	150000000000000000000000				
	180000000000000000000000				
	220000000000000000000000				
	270000000000000000000000				
	330000000000000000000000				
	390000000000000000000000				
	470000000000000000000000				
	560000000000000000000000				
	680000000000000000000000				
	820000000000000000000000				
	1000000000000000000000000				
	1200000000000000000000000				
	1500000000000000000000000				
	1800000000000000000000000				
	2200000000000000000000000				
	2700000000000000000000000				
	330000000000				