
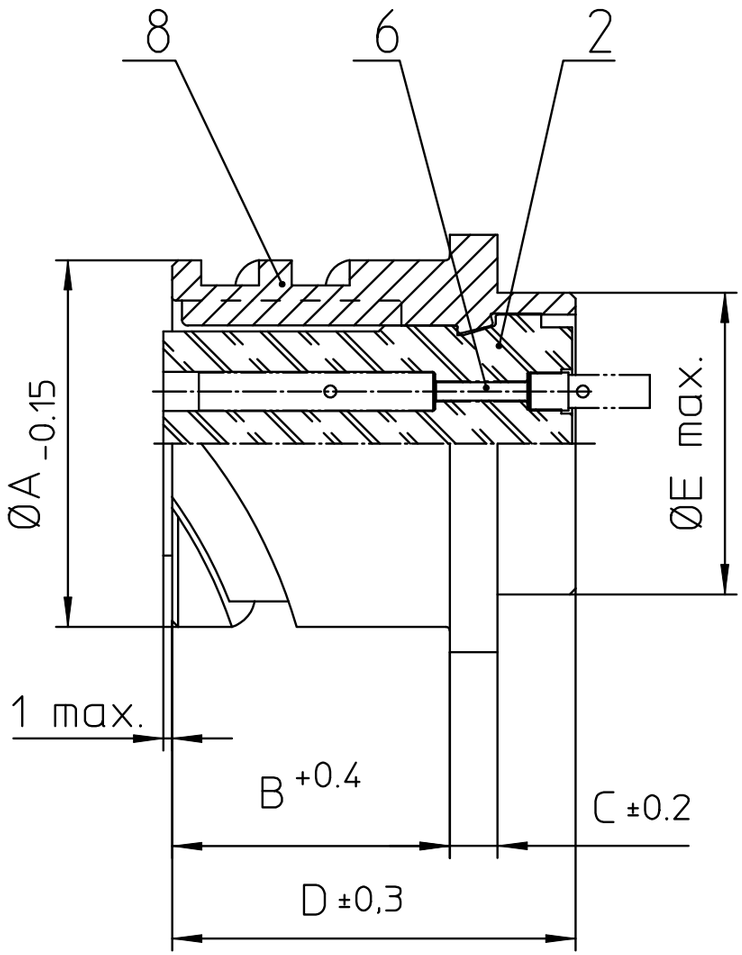
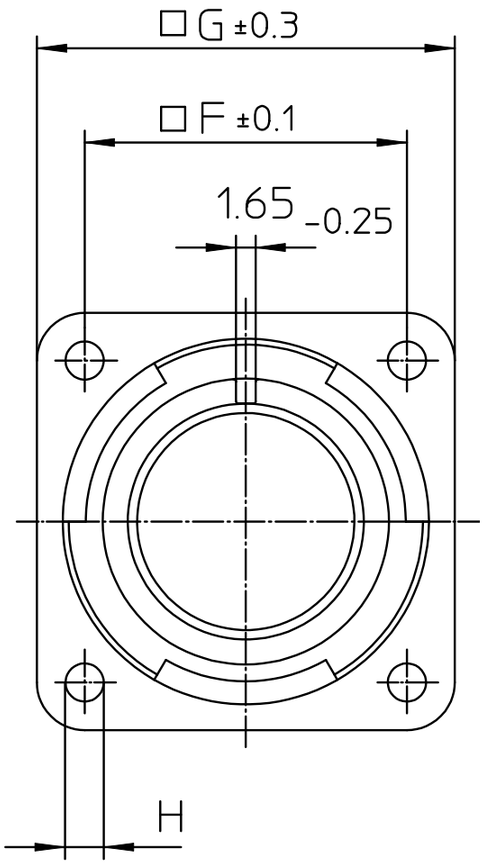



| NO. | MASSE / DIMENSIO |
|---|---|
| A | 30.8 |
| B | 23.05 |
| C | 4 |
| D | 33.8 |
| E | 25.6 |
| F | 27 |
| G | 35 |
| H | 3.2 |




| NO. | BESCHREIBUNG / DESCRIPTION |
|---|---|
| 2 | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 6 | KONTAKTBUCHSE / CONTACT SOCKET |
| 8 | DOSENGEHÄUSE / SHELL |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to chang
Drawings illustrate normal insulator positioning

| Material Specification: | |
|---|---|
| Shell Material: | Aluminium alloy |
| Shell Plating: | Olive drab chromate over cadmium (conductive) |
| Insulator Material: | CR-Elastomere |
| Contact Material: | Copper alloy |
| Contact Plating: | Hard silver |

all dimensions are in mm
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for
CUSTOMER

ITT
Engineered for life
ITT CANNON GmbH
D - 71384 Weinstadt/Germany

description
CA3102E18-1SXB-F80-05
Box mounting receptacle (rear mount, through holes)

AWG Crimp / Socket / Layout: 18-1

© All rights reserved. Reproduction or issue to third in any form whatever is only permitted with written authorization of ITT Cannon

page 1/1

revision
1840 30. Apr 20