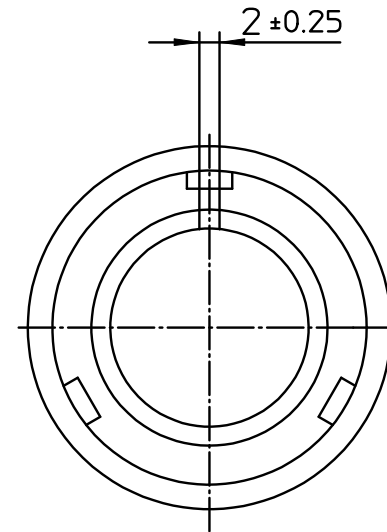
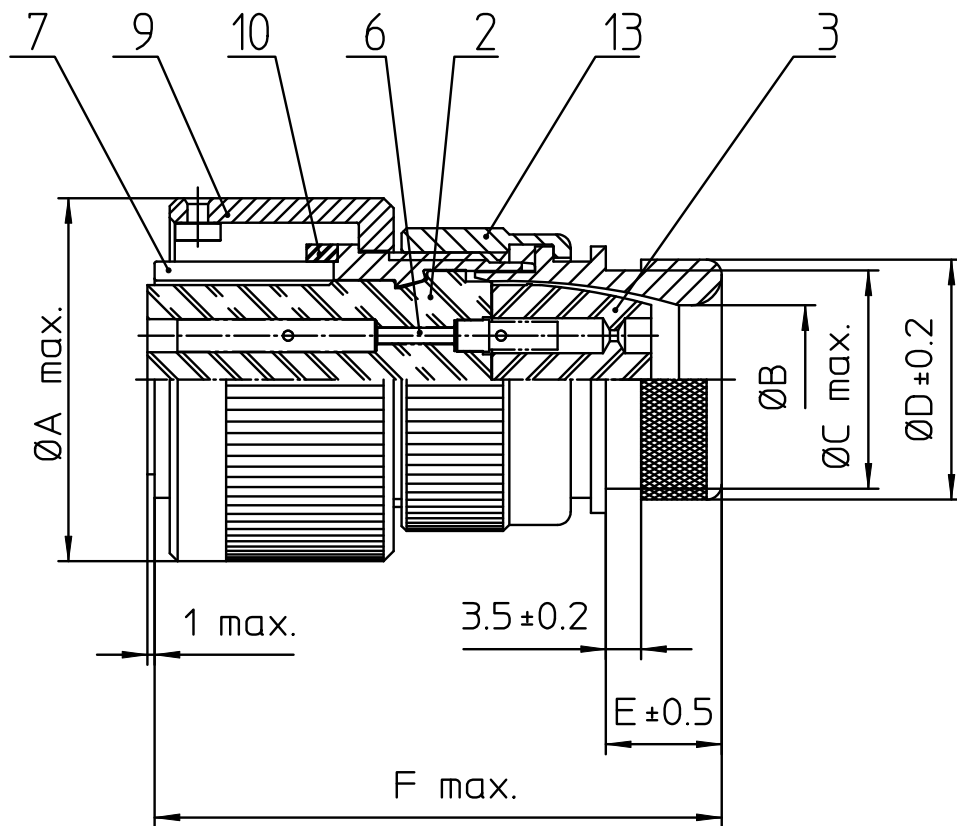


| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 43.1              |
| B   | 20.8              |
| C   | 26.2              |
| D   | 29.6              |
| E   | 12.7              |
| F   | 65                |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICHTKÖRPER / GROMMET                   |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 10  | DICHTRING FRONT / FRONT SEALING RING    |
| 13  | ENDGEHÄUSE DN / ENDBELL HEATSHRINK      |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
 Specification and Dimensions subject to change  
 Drawings illustrate normal insulator positioning

|                         |                                               |
|-------------------------|-----------------------------------------------|
| Material Specification: |                                               |
| Shell Material:         | Aluminium alloy                               |
| Shell Plating:          | Olive drab chromate over cadmium (conductive) |
| Insulator Material:     | CR-Elastomere                                 |
| Contact Material:       | Copper alloy                                  |
| Contact Plating:        | Hard silver                                   |

|                                                                                                                                                                                                     |  |                                                                                                                                       |                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                                   |  | drawing for<br>CUSTOMER                                                                                                               |                                             |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GmbH<br/>D - 71384 Weinstadt/Germany</small> |  | description <b>CA3106E22-9S-B-03-F0</b><br>Plug, straight<br>Endbell for heatshrinkable boots<br>Metric Crimp / Socket / Layout: 22-9 |                                             |
| <small>© All rights reserved. Reproduction or issue to third in any form<br/>whenever is only permitted with written authorization of ITT Cannon</small>                                            |  | <small>page<br/>1/1</small>                                                                                                           | <small>revision<br/>1840 30. Apr 20</small> |