
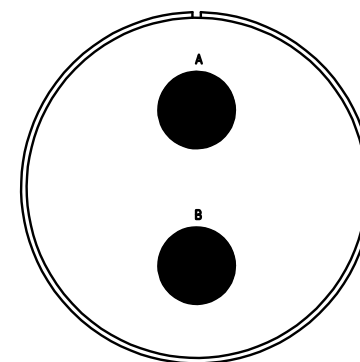
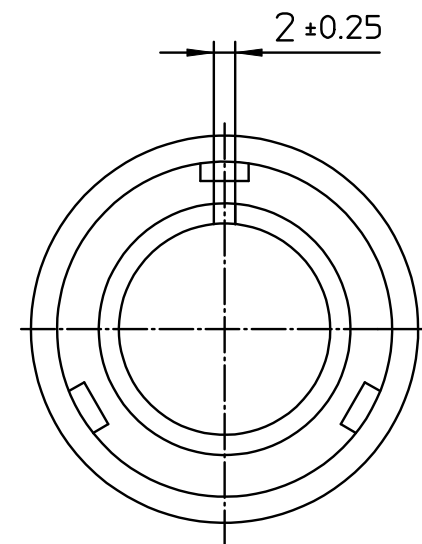


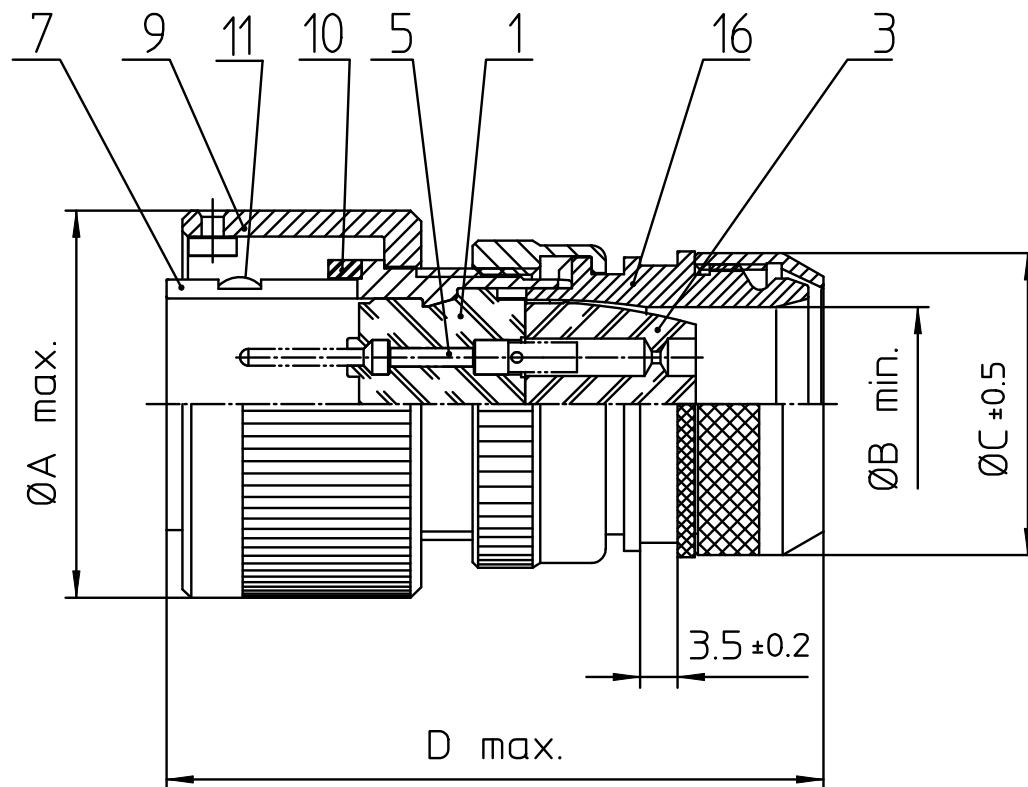

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 60.1              |
| B   | 33.3              |
| C   | 48                |
| D   | 70                |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN     |
| 3   | DICKTKÖRPER / GROMMET                   |
| 5   | KONTAKTSTIFT / CONTACT PIN              |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 10  | DICHTRING FRONT / FRONT SEALING RING    |
| 11  | SCHIRMKRANZ / SHIELDING BRAID           |
| 16  | ENDGEHÄUSE GESCHIRMT / ENDBELL SHIELDED |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

#### Material Specification:

|                     |                                               |
|---------------------|-----------------------------------------------|
| Shell Material:     | Aluminium alloy                               |
| Shell Plating:      | Olive drab chromate over cadmium (conductive) |
| Insulator Material: | CR-Elastomere                                 |
| Contact Material:   | Copper alloy                                  |
| Contact Plating:    | Hard silver                                   |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description **CA3106E32-5PXB-14-F0**  
Plug, straight shielded  
Shielded with endbell for shielded braids & heat shrinkable boots  
Metric Crimp / Pin / Layout: 32-5

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page 1/1  
revision 1840 30. Apr 20