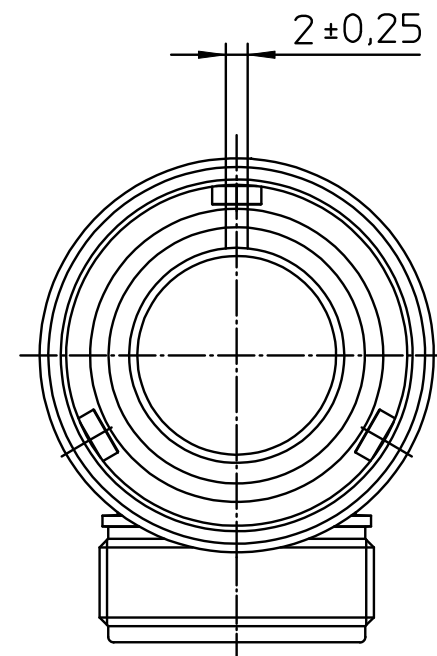
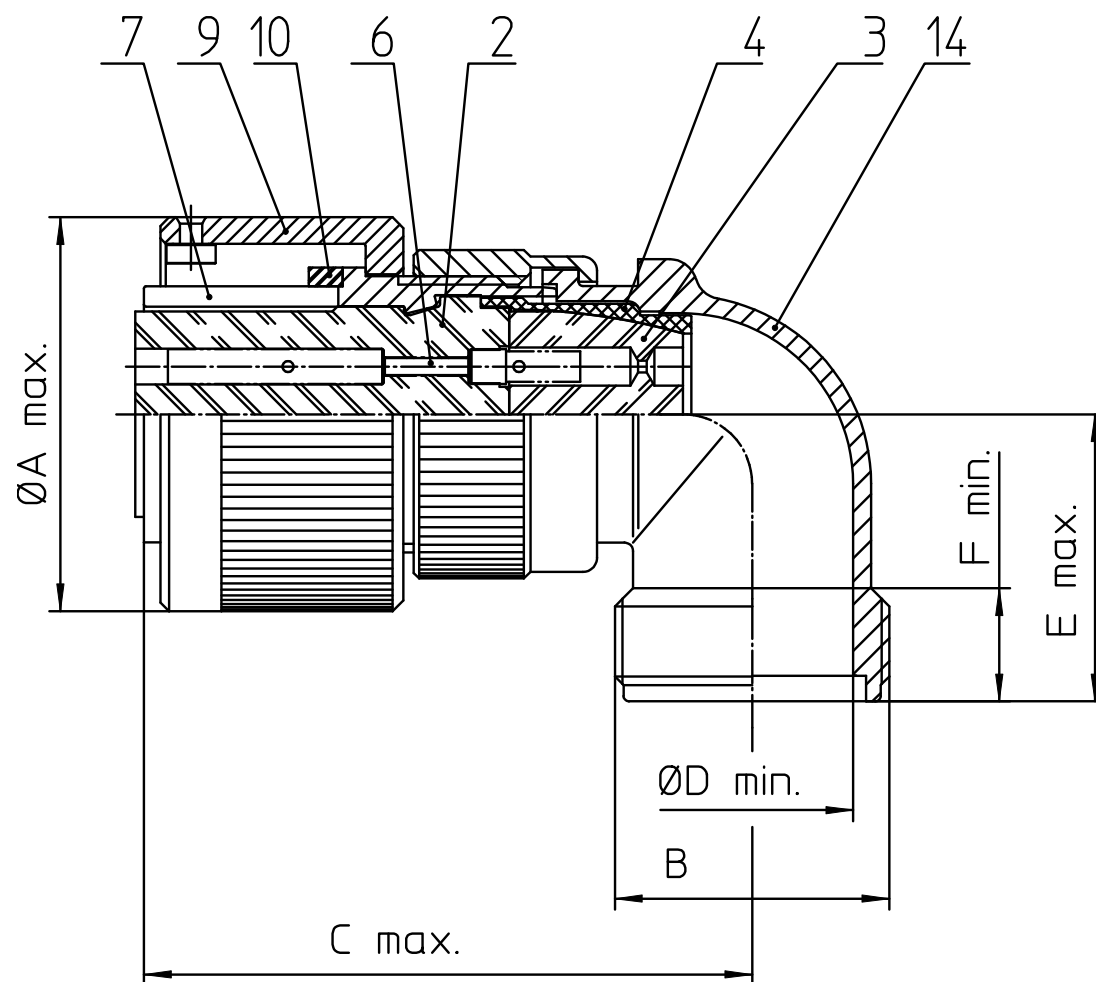


| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 39.9              |
| B   | 1 3/16-18UNEF-2A  |
| C   | 61                |
| D   | 21.9              |
| E   | 29                |
| F   | 9.4               |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICHTKÖRPER / GROMMET                   |
| 4   | ENDRING / ENDRING                       |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 10  | DICHTRING FRONT / FRONT SEALING RING    |
| 14  | F-ENDGEHÄUSE / F-ENDBELL                |

|                                                                                                    |
|----------------------------------------------------------------------------------------------------|
| Note: Due to an automatic nomenclature system, numbers generated may not be sequential.            |
| Specification and Dimensions subject to change<br>Drawings illustrate normal insulator positioning |

|                                                              |
|--------------------------------------------------------------|
| Material Specification:                                      |
| Shell Material: Aluminium alloy                              |
| Shell Plating: Olive drab chromate over cadmium (conductive) |
| Insulator Material: CR-Elastomere                            |
| Contact Material: Copper alloy                               |
| Contact Plating: Gold 0,5 µm                                 |

|                                                                                                                                                                                     |                                                                          |                                                                                                   |                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                   |                                                                          | drawing for<br>CUSTOMER                                                                           |                          |
| <br><b>ITT</b><br><i>Engineered for life</i><br>ITT CANNON GmbH<br>D - 71384 Weinstadt/Germany | description CA3108F20-11S-B-F80-A176                                     |                                                                                                   |                          |
|                                                                                                                                                                                     | Plug, 90°<br>Endbell for flex tube<br>AWG Crimp / Socket / Layout: 20-11 |                                                                                                   |                          |
| © All rights reserved. Reproduction or issue to third in any form<br>whenever is only permitted with written authorization of ITT Cannon                                            |                                                                          | <br>page 1/1 | revision 1840 30. Apr 20 |