

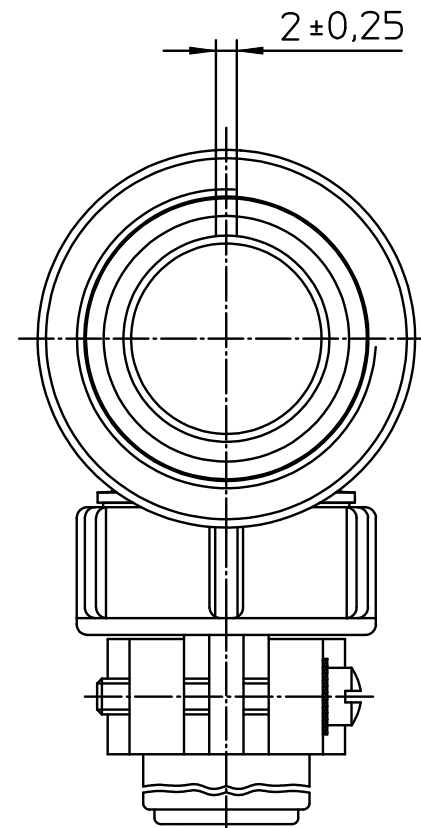


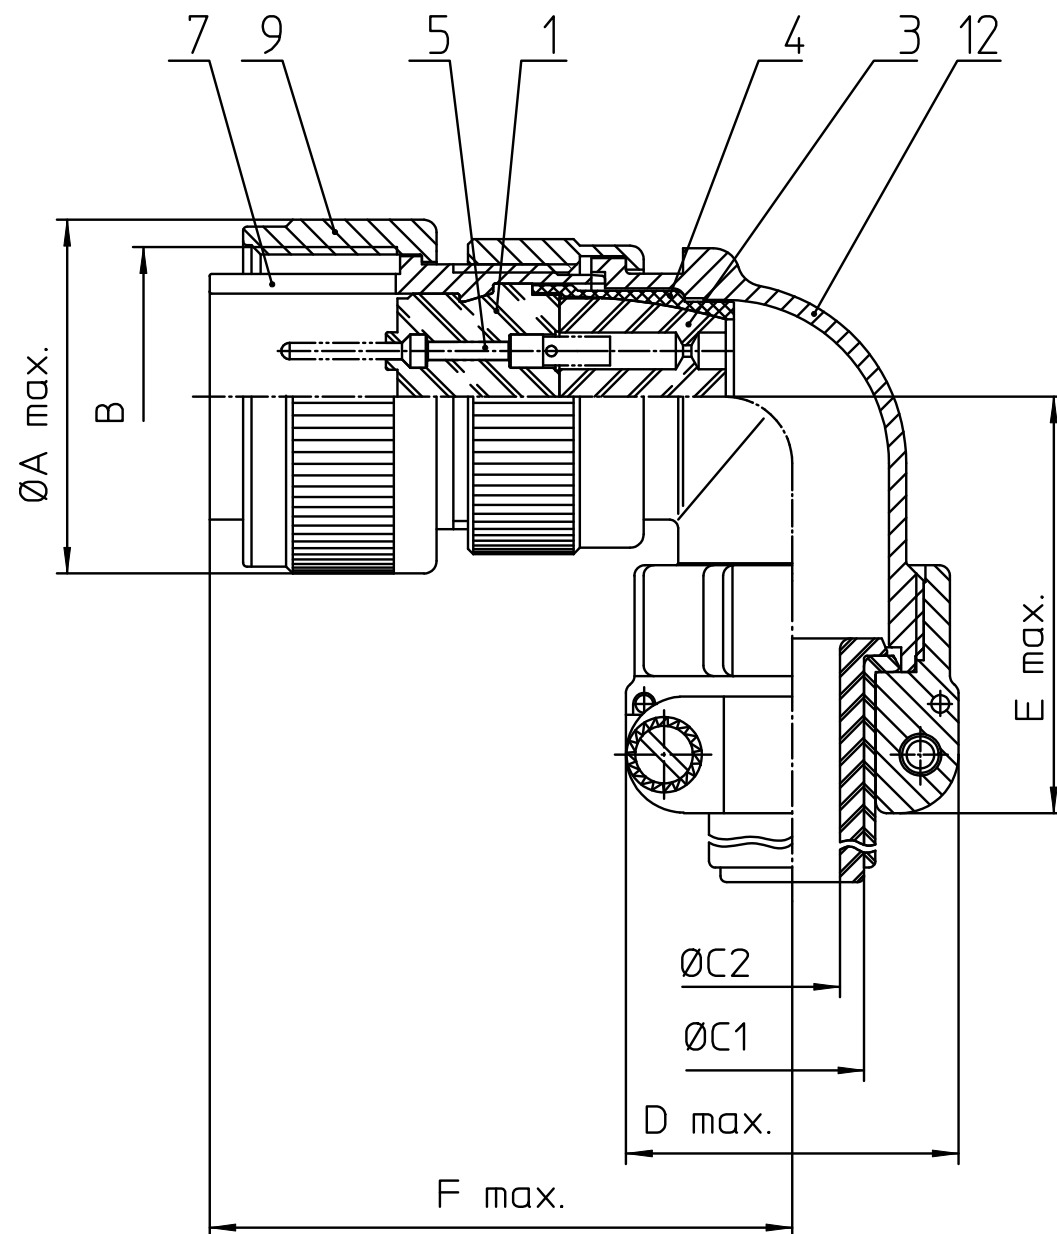

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 50.2              |
| B   | 1 3/4-18NS-2B     |
| C1  | 21.5              |
| C2  | 16.6              |
| D   | 43.3              |
| E   | 58                |
| F   | 66                |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT/ CONTACT PIN           |
| 7   | ZYLINDERGHÄUSE / BARREL             |
| 9   | ÜBERWURFMUTTER / COUPLING NUT       |
| 12  | ENDGEHÄUSE / ENDBELL                |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                         |                                                  |
|-------------------------|--------------------------------------------------|
| Material Specification: |                                                  |
| Shell Material:         | Aluminium alloy                                  |
| Shell Plating:          | Olive drab chromate coating over cadmium plating |
| Insulator Material:     | Neoprene                                         |
| Contact Material:       | Copper alloy                                     |
| Contact Plating:        | Hard silver                                      |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER

|                                                                                                                                                                                                     |                                                                    |               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------|
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GmbH<br/>D - 71384 Weinstadt/Germany</small> | description                                                        | MS3108E28-15P |
|                                                                                                                                                                                                     | Plug 90°                                                           |               |
|                                                                                                                                                                                                     | Endbell with clamp and bushing<br>Solder Cup / Pin / Layout: 28-15 |               |

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon

page 1/1  
revision 969 9. Apr 20