www.lemo.com

FGG.4B.348.PLAD10B

SUMMARY

Wires

Low voltage	**48**



Image is for illustrative purpose only

Series	4B
Termination type	Male solder
IP rating	50
AWG wire size	22.00 - 22.00
Cable Ø	9.10 - 10.50 mm
Status	active

Download

Request a quote

Catalog

See video assembly instructions

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FGY*: Straight plug, cable collet and PSU or PPSU outer shell
Keying	1 key (alpha=0, plug: male contacts, receptacle: female contacts)
Housing Material	Environment friendly aluminium
Weight	74.58 g

Performance

Configuration	4B.348 : 48 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/1.5)
Rated Current	1.5 Amps

Specifications

Contact Type: Solder
Contact Dia.: 0.7 mm (0.028in)
Bucket Dia.: 0.8 mm (0.031in)
Max. Stranded Conductor: 0.34 mm^2 (AWG 22)
Max. Conductor: 0.34 mm^2 (AWG 22)
R (max): 6.1 mOhm


Others

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 5000
Temp (min / max): -55°C / +250°C
Humidity (max): <=95% [at 60 deg C /140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)

DRAWINGS

Draws

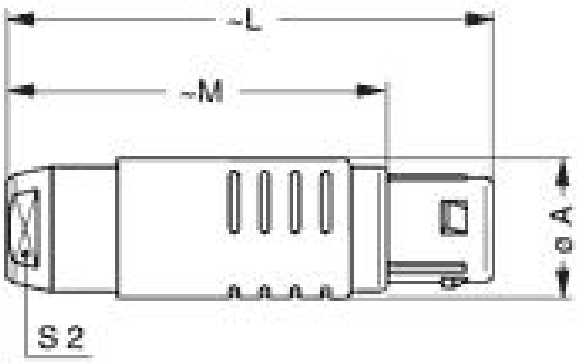





Dimensions

	A	L	M	S2
mm.	26	76.2	58.2	20
in.	1.02	3.00	2.29	0.79

RECOMMENDED BY LEMO

Tools

Caps: BFG.4B.100.NAS

Cables

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.