

SUMMARY

Wires

Low voltage 8



Image is for illustrative purpose only

Series	1W
Termination type	Female solder
IP rating	68
AWG wire size	22.00 - 22.00
Cable Ø	0.00 - 0.00 mm
Status	active
Matching parts	FVG.1W.308.CLAC40

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	HV*: Fixed socket, nut fixing, vacuumtight
Keying	1 key (alpha=0; Plug: male contacts; Receptacle: female contacts)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Variant	P : Watertight
Weight	20.43 g

Performance

Configuration	1W.308 : 8 Low Voltage
Insulator	
Rated Current	5 Amps

Specifications

Contact Type: Solder
Contact Dia.: 0.7 mm (0.028in)
Bucket Dia.: 0.8 mm (0.031in)
Max. Solid Conductor: 0.34 mm ² (AWG 22)
Max. Stranded Conductor: 0.34 mm ² (AWG 22)
R (max): 6.1 mOhm
Vtest (contact-contact): 950 V (AC) 1300 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


Vtest (contact-shell): 1150 V (AC) 1600 V (DC)

Others

- Endurance (Shell): 1000 mating cycles
- Temp (min / max): -20°C / +100°C
- Humidity (max): <=95% [at 60 deg C /140 F]
- Climatical Category: 20/200/21
- Shielding (min): 95 dB (10 MHz)
- Shielding (min): 80 dB (1 GHz)
- Salt Spray Corrosion: >1000 hr
- Pressure: 60 bars

DRAWINGS

Draws

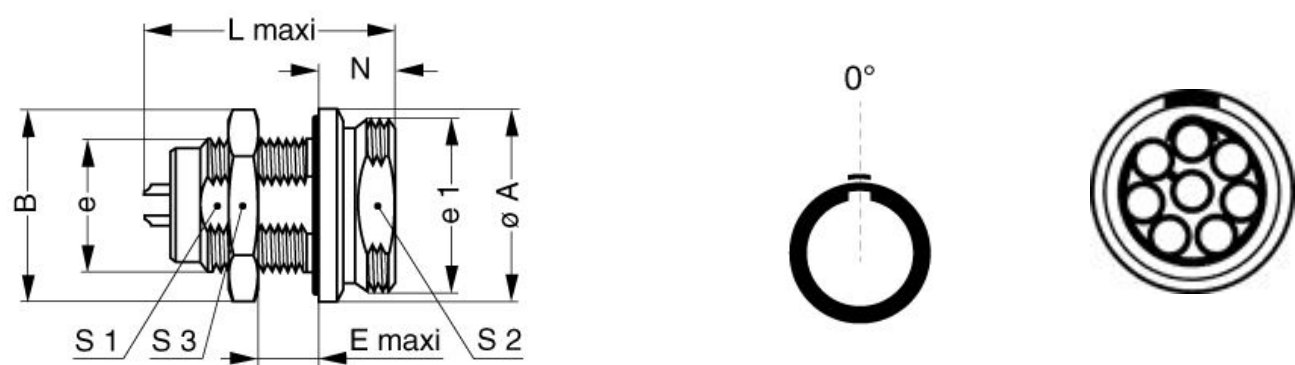

Dimensions

	A	B	E	L	N	S1	S2	S3	e	e1
mm.	18.3	19.5	11.5	30	8	12.5	14.5	17	M14x1.0	M16x1.0
in.	0.72	0.77	0.45	1.18	0.31	0.49	0.57	0.67		

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Cables

CMN.08.T22.059PGCE	PVC	GREY	
CMN.08.T22.059PNCE	PVC	Black	
CMN.08.T26.042QGZE	TPR (medical)	Grey	
CMN.08.T22.059PGZE		Grey	
CMN.08.T22.059PNZE			
CMN.08.T22.059QGC	TPR	Grey	
CMN.08.T22.059QGZE	TPR (medical)	Grey	
008 050	PVC	Black	
008 280	PVC	Black	
016 080	PVC	Grey	
042 265	PVC	Yellow	
080 140	PVC	Grey	
108 220	PVC	Black	
108 240	PTFE	White	
108 260	PTFE	White	
180 240	PVC	Black	
180 260	PVC	Black	
280 250	PVC	Grey	
335 990	PVC	Black	
335 991	PVC	Black	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.