

Solder Tail Single Row

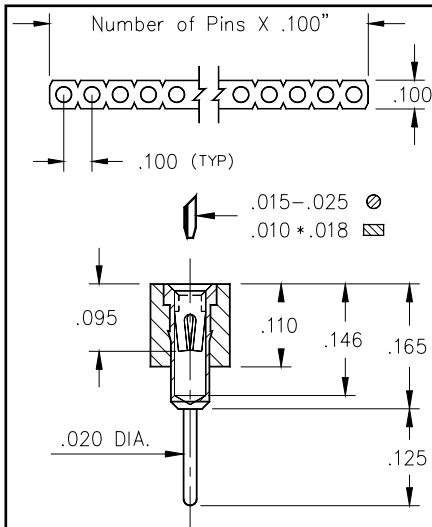


Fig. 1

- SIP sockets accept .015 - .025" diameter pins and standard IC leads.
- Various solder tails available: standard length, long for multi-layer boards, very low and ultra low profile. See Mill-Max #1001, 0134, 0501 or 0703 pins (pages 130, 131, 134) for details.
- Hi-Rel, 4-finger BeCu #12 & #30 clips rated at 3 amps. See pages 207 & 208 for details.



Ordering Information

Fig. 1	Series 310...001	Standard Solder Tail
	310-XX-1__-41-001	Specify # of pins → 01-64
Fig. 2	Series 311...001	Long Solder Tail
	311-XX-1__-41-001	Specify # of pins → 01-64
Fig. 3	Series 315...001	Very Low Profile
	315-XX-1__-41-001	Specify # of pins → 01-64
Fig. 4	Series 315...003	Ultra Low Profile
	315-XX-1__-41-003	Specify # of pins → 01-64

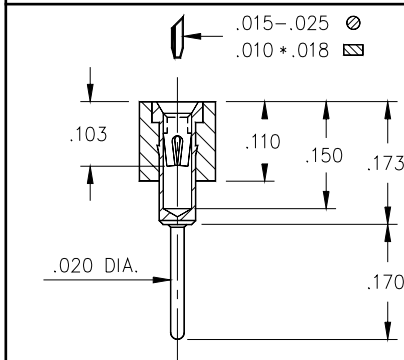


Fig. 2

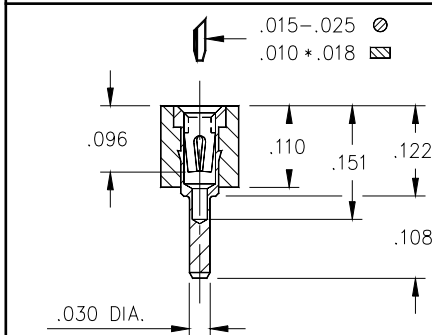


Fig. 3

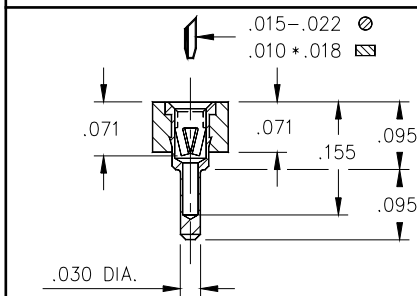


Fig. 4

*XX= Plating Code
See Below*

*For High
Temperature
Insulators
Add '100'
To End Of
Part Numbers*

SPECIFY PLATING CODE XX=	13	91	93	99
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb	200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)	30μ" Au	10μ" Au	30μ" Au	200μ" Sn/Pb