

INTERCONNECTS

SERIES 316 • .100" GRID ELEVATED • SINGLE ROW STRIPS

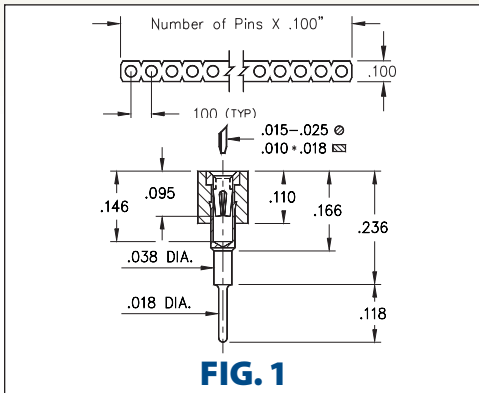


FIG. 1

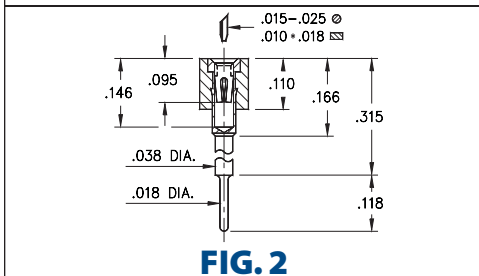


FIG. 2

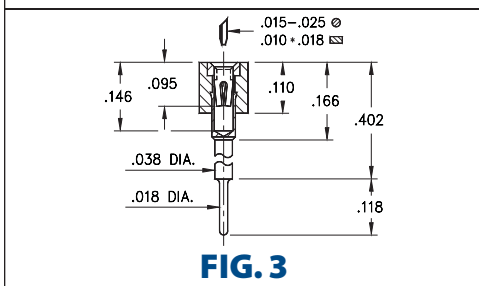


FIG. 3

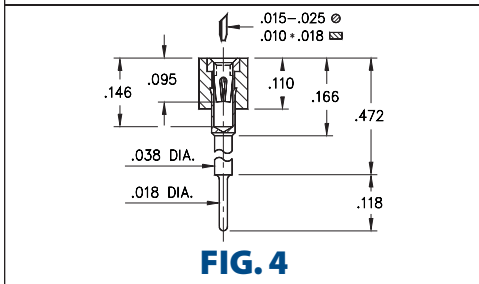


FIG. 4

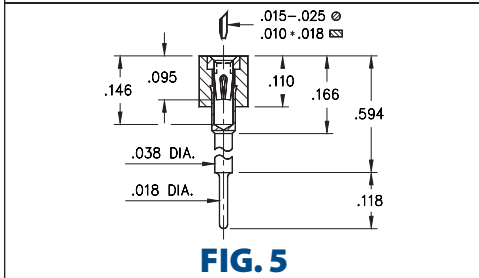



FIG. 5

- Elevated socket strips are available in 5 different heights:






316...006 uses pin # 0153-1
 316...003 uses pin # 0153-2
 316...007 uses pin # 0153-3
 316...008 uses pin # 0153-4
 316...001 uses pin # 0153-5
 See page 167 for details

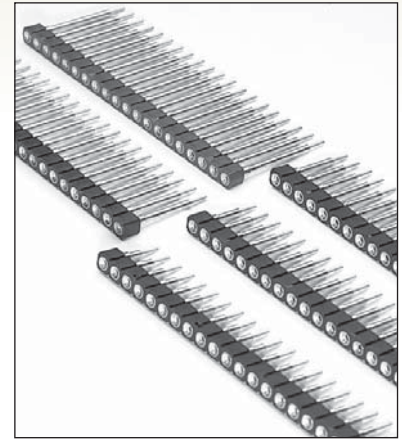- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See pages 253 for details

- Insulators are high temperature thermoplastic, suitable for all soldering operations



ORDERING INFORMATION

	Series 316...006	Standoff Height = .236			
FIG. 1	316-XX-1	-41-006000			
	Specify number of pins	01-64			
FIG. 2	Series 316...003	Standoff Height = .315			
	316-XX-1	-41-003000			
	Specify number of pins	01-64			
FIG. 3	Series 316...007	Standoff Height = .402			
	316-XX-1	-41-007000			
	Specify number of pins	01-64			
FIG. 4	Series 316...008	Standoff Height = .472			
	316-XX-1	-41-008000			
	Specify number of pins	01-64			
FIG. 5	Series 316...001	Standoff Height = .594			
	316-XX-1	-41-001000			
	Specify number of pins	01-64			
  					
SPECIFY PLATING CODE XX=	91	93	41 \diamond	43 \diamond	
Sleeve (Pin) 	200 μ " Sn/Pb	200 μ " Sn/Pb	200 μ " Sn	200 μ " Sn	
Contact (Clip) 	10 μ " Au	30 μ " Au	10 μ " Au	30 μ " Au	