

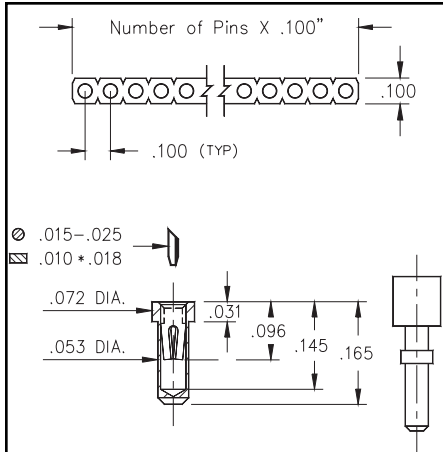


Fig. 1

- Low profile receptacles sit .031" above board.
- Series 714 uses M-M# 1401 & 1407 pin receptacles. See page 126 for details.
- Hi-Rel 4-finger BeCu #30 contact is used in the 1401 receptacle and a #11 contact is used in the 1407. Both are rated at 3 amps. See pages 206 & 208 for details.



Ordering Information

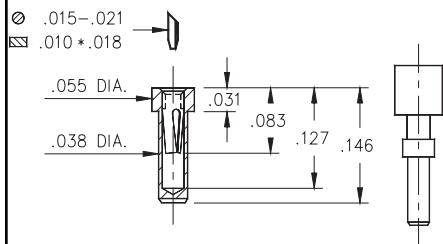


Fig. 2

Fig. 1

Single Row (.055 min. mounting hole)

714-XX-1__-41-001000
Specify # of pins → 01-64

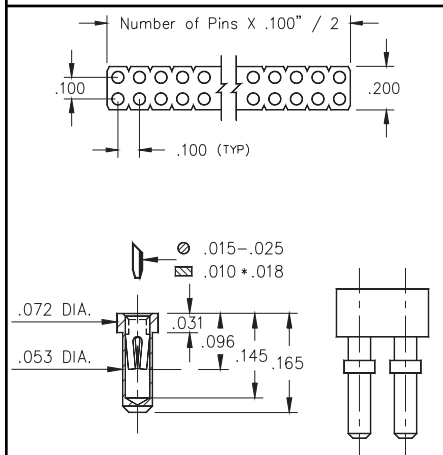


Fig. 3

Fig. 3

Single Row (.039 min. mounting hole)

714-XX-1__-31-007000
Specify # of pins → 01-64

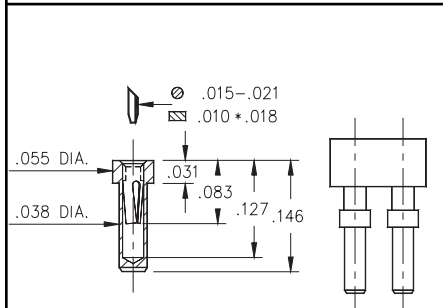


Fig. 4

Fig. 4

Double Row (.055 min. mounting hole)

714-XX-2__-41-001000
Specify # of pins → 02-64

Double Row (.039 min. mounting hole)

714-XX-2__-31-007000
Specify # of pins → 02-64

XX=Plating Code
See Below



*For RoHS compliance, select **◇** plating code. For the all gold option (XX=13) also change part number from 71X-XX-XXX-X1-00X000 to 71X-13-XXX-X1-00X100*

SPECIFY PLATING CODE XX=	13◇		93	99		43◇	44◇
Sleeve (Pin)	10μ" Au		200μ" Sn/Pb	200μ" Sn/Pb		200μ" Sn	200μ" Sn
Contact (Clip)	30μ" Au		30μ" Au	200μ" Sn/Pb		30μ" Au	200μ" Sn