



CLE SERIES

(0.80 mm) .0315"



COST-EFFECTIVE MICRO SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?CLE

Insulator Material:
Black Liquid Crystal Polymer
Contact Material:
BeCu
Plating:
Au over 50 μ" (1.27 μm) Ni
Current Rating (CLE/FTE):
2.7 A per pin
(2 pins powered)
Operating Temp Range:
-55 °C to +125 °C
Insertion Depth:
Top Entry = (1.73 mm) .068"
to (3.18 mm) .125" with
(0.38 mm) .015" wipe, or
pass-through
Bottom Entry = (3.23 mm) .127"
minimum plus board thickness
Normal Force:
75 grams (0.73 N)
Max Cycles:
100 with 10 μ" (0.25 μm) Au
RoHS Compliant:
Yes

Mates with:
FTE, AW

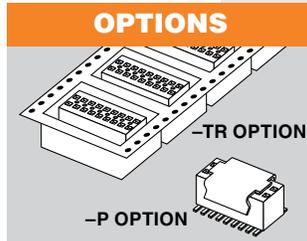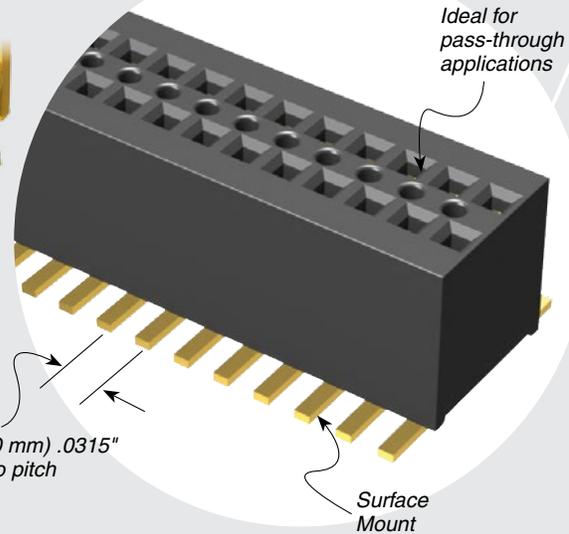


PROCESSING

Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
(0.10 mm) .004" max (04-65)
(0.15 mm) .006" max (66-90)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality

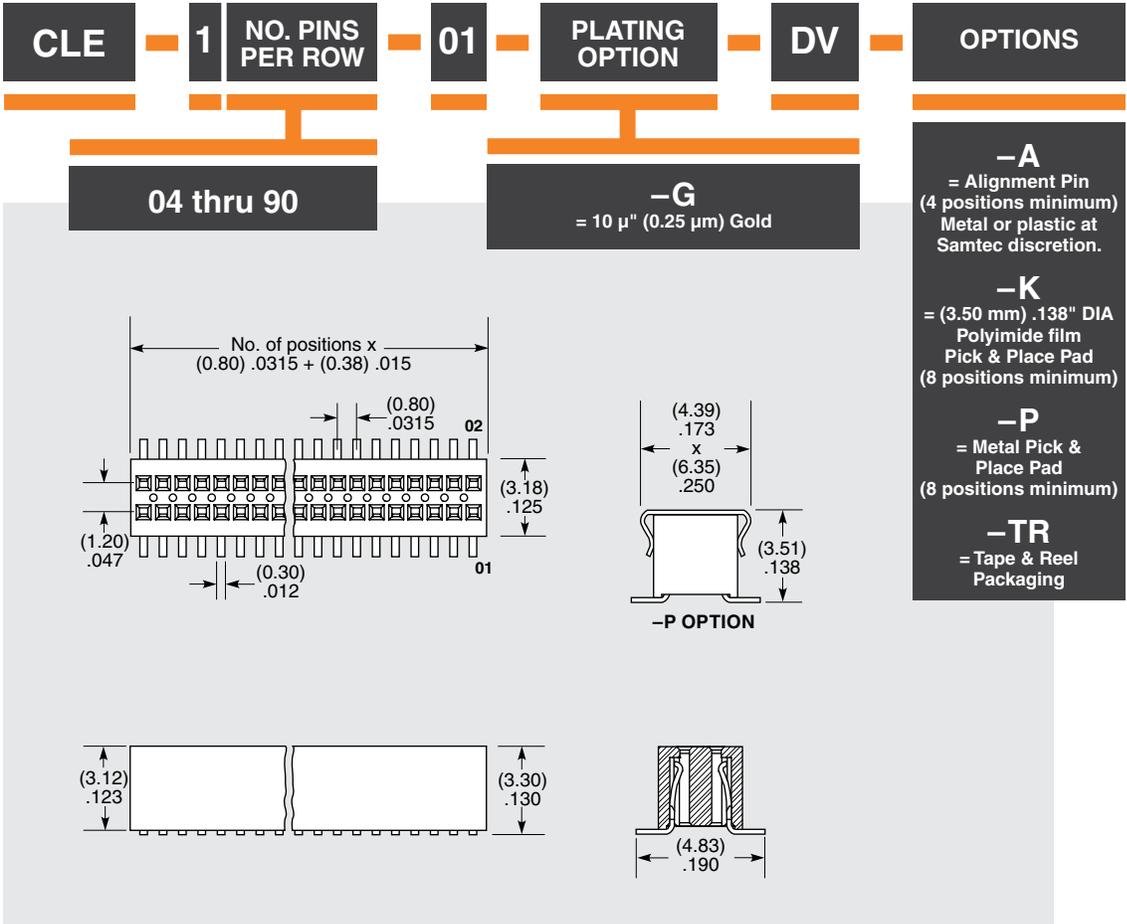

Note:
Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.