

(1,27 mm) .050"

TMS, HTMS, SNM SERIES

HTMS-110-03-L-D-RA

HTMS-107-01-G-S

TMS-132-51-G-S

TMS-110-02-G-D

THROUGH-HOLE MICRO HEADER

SPECIFICATIONS

For complete specifications see www.samtec.com?TMS or www.samtec.com?HTMS

Insulator Material:

Black Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Au or Sn over

50µ" (1,27 µm) Ni

Current Rating:

1A per contact

Operating Temp Range:

-55°C to +105°C with Tin;

-55°C to +125°C with Gold

RoHS Compliant:

Yes

Important Note:

Style -02 does not mate with SMS Series.

SNM

For complete specifications see www.samtec.com?SNM

Same as HTMS except:

Insulator Material:

Black Glass Filled Polyester

Contact Resistance:

10 mΩ

Lead Size accepted:

(0,46 mm) .018" SQ

Insertion Depth:

(3,43 mm) .135" minimum

Max Processing Temp:

Not recommended for IR/VP

Processing:


Lead-Free Solderable:

Yes

Mates with:

SMS, SLM, RSM


ALSO AVAILABLE



Standard or high temp body

Position anywhere in the body with (3,05 mm) .120" minimum tail

For variable post micro terminal strips see www.samtec.com?MTMS or www.samtec.com?HMTMS

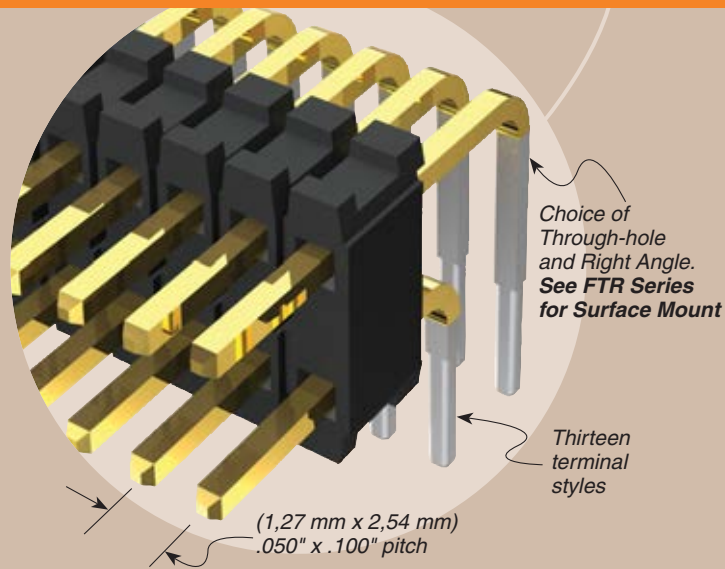

Choice of Through-hole and Right Angle. See FTR Series for Surface Mount

Thirteen terminal styles

(1,27 mm x 2,54 mm) .050" x .100" pitch

TYPE STRIP

1

NO. PINS PER ROW

LEAD STYLE

PLATING OPTION

ROW OPTION

OPTION

TMS

= Standard


HTMS

= High Temp



01
thru
50Specify
LEAD
STYLE
from
chart-L
= 10µ"
(0,25 µm)
Gold on post,
Matte Tin
on tail-S
= Single
Row-D
= Double
Row-RA
= Right
Angle

-“XXX”
= Polarized
Position
(Specify
position of
omitted pin)

MICRO SHUNT SNM SERIES



Part No.	Plating
SNM-100-BK-T	Tin
SNM-100-BK-G	10µ" (0,25 µm) Gold



T/H LEAD STYLE	A	B	C
-01	(11,43) .450	(5,84) .230	(3,05) .120
-02	(8,13) .320	(2,54) .100	
-21	(12,83) .505	(5,84) .230	(4,45) .175
-51	(10,41) .410	(4,83) .190	
-52	(10,80) .425	(5,21) .205	
-53	(12,83) .505	(7,24) .285	
-54	(14,10) .555	(8,51) .335	
-55	(15,49) .610	(9,91) .390	
-56	(15,88) .625	(10,29) .405	
-57	(16,51) .650	(10,92) .430	
-58	(17,91) .705	(12,32) .485	
-59	(19,18) .755	(13,59) .535	
-60	(20,96) .825	(15,37) .605	

Note: Other Gold plating options available. Contact Samtec.

RA LEAD STYLE	B
-01	(5,84) .230
-02	(2,54) .100
-03	(3,18) .125

Note: Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
 SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
 SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683