

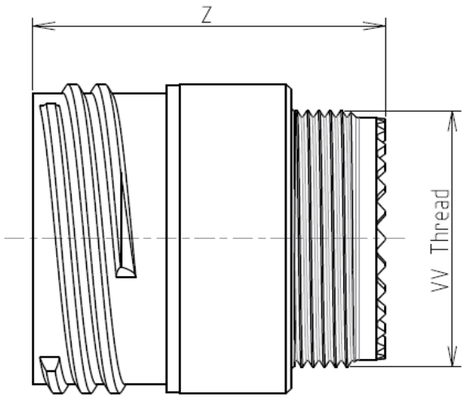


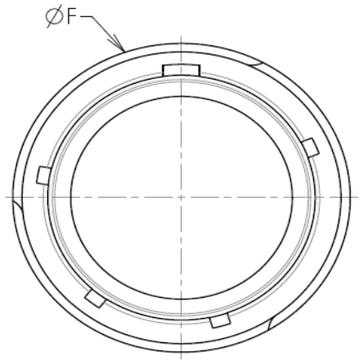

Keying Shown as example

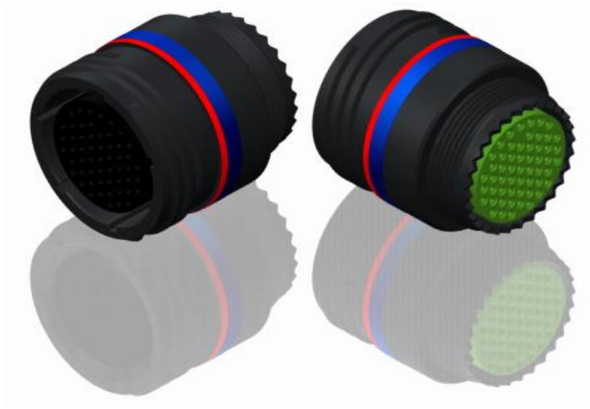

LAYOUT SHOWN AS EXAMPLE

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III
-Shell Material : Aluminium
-Shell Plating : Black Zinc Nickel
-Insulator : Thermoplastic
-Contacts : Copper Alloy
-Seals & Grommet : Silicon Elastomer
-Contact Plating : Gold over copper Alloy 0.8µm minimum
-Durability : 500 Mating cycles
-Delivered with Souriau contacts and Accessories
-Temperature Range : -65°C to +175°C
-Salt Spray : 500 hours

Connector dimension	
Dim	**Nominal**
F	31.75 Max
Z	31.5 Max
VV THREAD	M28x1-6g

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D119Z28SD

BASIC SERIES:	8D	1	-	19	Z	28	S	D
SHELL TYPE : In line Receptacle								
CONTACT TYPE : Standard Crimp Contact								
SHELL SIZE : 19								
PLATING : Z = Black Zinc Nickel								
								ORIENTATION : D
								CONTACT TYPE : SOCKET(500 Matings)
								CONTACT LAYOUT : 19-28

ISS	DATE	Latest modification - by	MOD N°
A	24-09-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Inline plug 8D series


SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D119Z28SD-C | SHEET 1/2

Contact Layout



Contacts (Insert arrangement 19-28)					
Contact position ID	Contact location X-axis (mm)	Contact location Y-axis (mm)	Contact position ID	Contact location X-axis (mm)	Contact location Y-axis (mm)
A	+.066 (1.68)	+.353 (8.97)	R	-.286 (7.26)	+.217 (5.51)
B	+.189 (4.80)	+.305 (7.75)	S	-.189 (4.80)	+.305 (7.75)
C	+.286 (7.26)	+.217 (5.51)	T	-.066 (1.68)	+.353 (8.97)
D	+.345 (8.76)	+.098 (2.49)	U	+.000 (0.00)	+.230 (5.84)
E	+.357 (9.07)	-.033 (0.84)	V	+.124 (3.15)	+.193 (4.90)
F	+.321 (8.15)	-.160 (4.06)	W	+.209 (5.31)	+.095 (2.41)
G	+.242 (6.15)	-.265 (6.73)	X	+.228 (5.79)	-.033 (0.84)
H	+.130 (3.30)	-.335 (8.51)	Y	+.174 (4.42)	-.151 (3.84)
J	+.000 (0.00)	-.359 (9.12)	Z	+.000 (0.00)	-.191 (4.85)
K	-.130 (3.30)	-.335 (8.51)	a	-.174 (4.42)	-.151 (3.84)
L	-.242 (6.15)	-.265 (6.73)	b	-.228 (5.79)	-.033 (0.84)
M	-.321 (8.15)	-.160 (4.06)	c	-.209 (5.31)	+.095 (2.41)
N	-.357 (9.07)	-.033 (0.84)	d	-.124 (3.15)	+.193 (4.90)
P	-.345 (8.76)	+.098 (2.49)	e	+.000 (0.00)	+.062 (1.57)

Shell size	Arrangement no.	Number of contacts	Size contacts	Service rating	Contact location	Supersedes
19	-28	2	16	I	e, Z	MS20054-28
		26	20		All others	

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D119Z28SD

ISS	DATE	Latest modification - by	MOD N°
A	24-09-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Inline plug 8D series

SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D119Z28SD-C | SHEET 2/2