

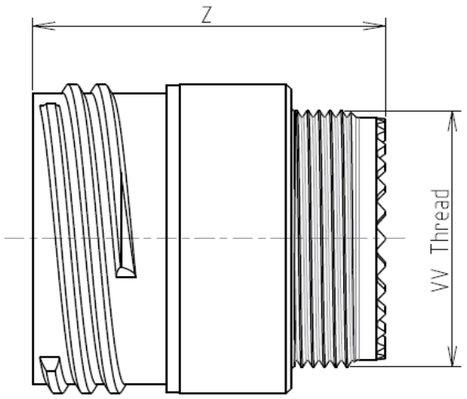


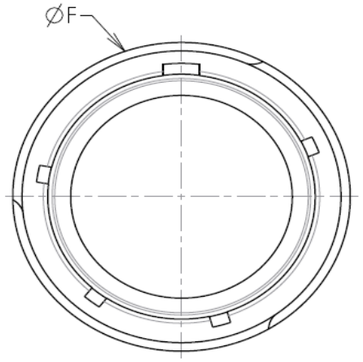

Keying Shown as example

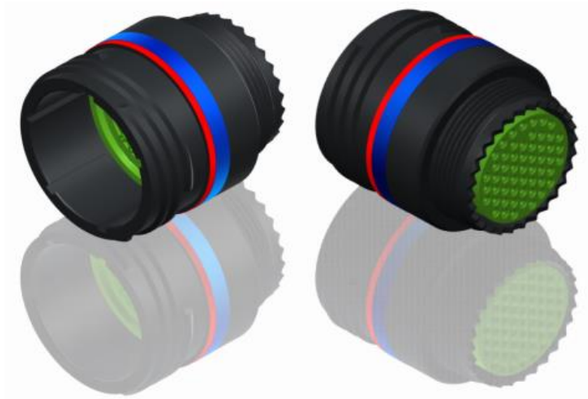

LAYOUT SHOWN AS EXAMPLE

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III
-Shell Material : Aluminium
-Shell Plating : Black Zinc Nickel
-Insulator : Thermoplastic
-Contacts : Copper Alloy
-Seals & Grommet : Silicon Elastomer
-Contact Plating : Gold over copper Alloy 0.8µm minimum
-Durability : 500 Mating cycles
-Delivered with Souriau contacts and Accessories
-Temperature Range : -65°C to +175°C
-Salt Spray : 500 hours

Connector dimension	
Dim	**Nominal**
F	35 Max
Z	31.5 Max
VV THREAD	M31x1-6g

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D121Z75AC

BASIC SERIES:	8D	1	-	21	Z	75	A	C
SHELL TYPE : In line Receptacle								
CONTACT TYPE : Standard Crimp Contact								
SHELL SIZE : 21								
PLATING : Z = Black Zinc Nickel								

ORIENTATION : C
CONTACT TYPE : PIN(500 Matings)
CONTACT LAYOUT : 21-75

ISS	DATE	Latest modification - by	MOD N°
A	24-09-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Inline plug 8D series


SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D121Z75AC-C | SHEET 1/2

Contact Layout



(Inactive for new design for MIL-DTL-38999. For new design, use arrangement no. 21-76.)

Contacts (Insert arrangement 21-75)		
Contact position ID	Location	
	X axis	Y axis
A	+.180 (4.57)	+.180 (4.57)
B	+.180 (4.57)	-.180 (4.57)
C	-.180 (4.57)	-.180 (4.57)
D	-.180 (4.57)	+.180 (4.57)

Shell size	Arrangement no.	Number of contacts	Size contacts	Service rating	Contact location	Standard contact	
						Pin	Socket
21	-75	4	8 (see note)	Twinax	All	M39029/90-529	M39029/91-530

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D121Z75AC

ISS	DATE	Latest modification - by	MOD N°
A	24-09-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Inline plug 8D series

SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D121Z75AC-C | SHEET 2/2