

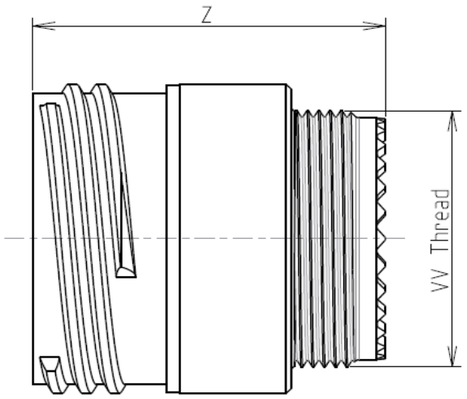


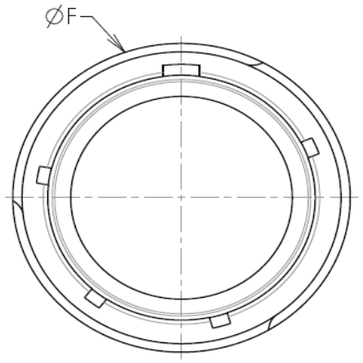

Keying Shown as example

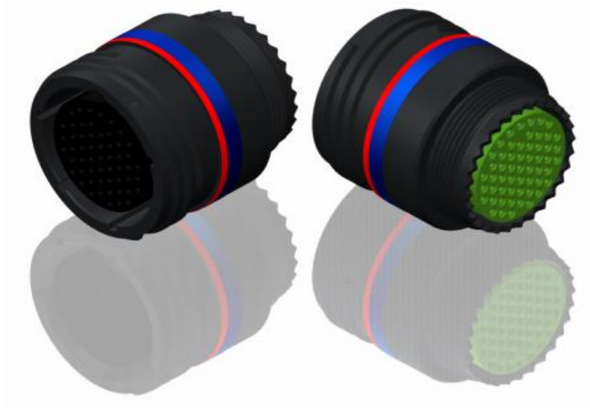

LAYOUT SHOWN AS EXAMPLE

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III
-Shell Material : Aluminium
-Shell Plating : Black Zinc Nickel
-Insulator : Thermoplastic
-Contacts : Copper Alloy
-Seals & Grommet : Silicon Elastomer
-Contact Plating : Gold over copper Alloy 0.8µm minimum
-Durability : 500 Mating cycles
-Delivered with Souriau contacts and Accessories
-Temperature Range : -65°C to +175°C
-Salt Spray : 500 hours

Connector dimension	
Dim	**Nominal**
F	35 Max
Z	31.5 Max
VV THREAD	M31x1-6g

BASIC SERIES:	8D	1	-	21	Z	77	B	C	
SHELL TYPE : In line Receptacle									
CONTACT TYPE : Standard Crimp Contact									ORIENTATION : C
SHELL SIZE : 21									CONTACT TYPE : SOCKET(500 Matings)
PLATING : Z = Black Zinc Nickel									CONTACT LAYOUT : 21-77

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D121Z77BC

ISS	DATE	Latest modification - by	MOD N°
A	24-09-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Inline plug 8D series

SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU | WWW.SOURIAU.COM | This document is the property of SOURIAU
it must not be reproduced or
communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D121Z77BC-C | SHEET 1/2

Contact Layout

77



17#22D
2#8 Triax

21-77		
Ctc	X	Y
A	1.96	8.38
B	5.46	7.67
C	8.51	5.79
D	10.46	2.82
E	10.46	-2.82
F	8.51	-5.79
G	5.46	-7.67
H	1.96	-8.38
J	0	-5.41
K	-1.96	-8.38
L	-5.46	-7.67
M	-8.51	-5.79
N	-10.46	-2.82
P	-10.46	2.82
R	-8.51	5.79
S	-5.46	7.67
T	-1.96	8.38
U	-4.57	0
V	4.57	0

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D121Z77BC

ISS	DATE	Latest modification - by	MOD N°
A	24-09-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Inline plug 8D series

SCALE NA

General linear Tolerances: ±--

NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of
SOURIAU
it must not be reproduced or
communicated without permission

FORMAT A3

SOURIAU DRG N° 8D121Z77BC-C