

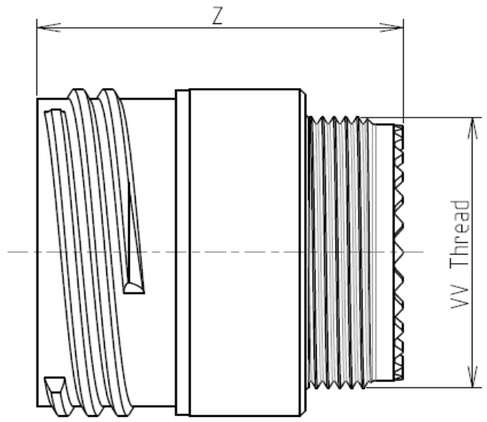


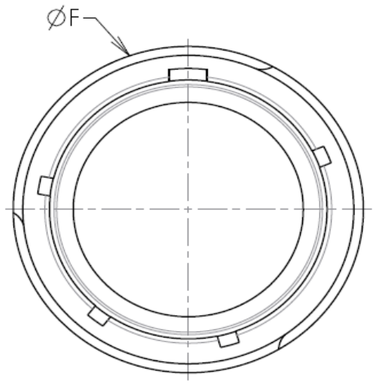

Keying Shown as example

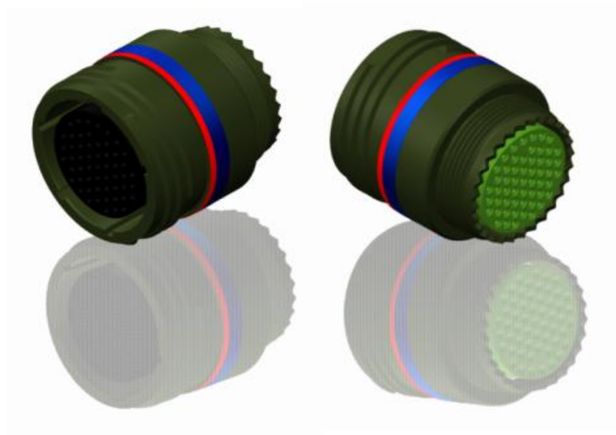

LAYOUT SHOWN AS EXAMPLE

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III
-Shell Material : Aluminium
-Shell Plating : Olive drab Cadmium
-Insulator : Thermoplastic
-Contacts : Copper Alloy
-Seals & Grommet : Silicon Elastomer
-Contact Plating : Gold over copper Alloy 0.8µm minimum
-Durability : 500 Mating cycles
-Delivered with Souriau contacts and Accessories
-Temperature Range : -65°C to +175°C
-Salt Spray : 500 hours

Connector dimension	
Dim	**Nominal**
F	38.1 Max
Z	31.5 Max
VV THREAD	M34x1-6g

BASIC SERIES:	8D	1	-	23	W	32	B	N
SHELL TYPE : In line Receptacle								
CONTACT TYPE : Standard Crimp Contact								
SHELL SIZE : 23								
PLATING : W = Olive drab Cadmium								

ORIENTATION : N
CONTACT TYPE : SOCKET(500 Matings)
CONTACT LAYOUT : 23-32

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D123W32BN

ISS	DATE	Latest modification - by	MOD N°
A	26-09-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Inline plug 8D series


SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D123W32BN-C | SHEET 1/2

Contact Layout



Contacts (Insert arrangement 23-32)					
Contact position ID	Location X-axis (mm)	Location Y-axis (mm)	Contact position ID	Location X-axis (mm)	Location Y-axis (mm)
A	+.100 (2.54)	+.450 (11.43)	T	+.325 (8.26)	+.025 (0.64)
B	+.325 (8.26)	+.325 (8.26)	U	+.300 (7.62)	-.125 (3.18)
C	+.425 (10.80)	+.150 (3.81)	V	+.200 (5.08)	-.250 (6.35)
D	+.450 (11.43)	-.075 (1.91)	W	+.000 (0.00)	-.300 (7.62)
E	-.375 (9.53)	-.275 (6.99)	X	-.200 (5.08)	-.350 (8.89)
F	+.200 (5.08)	-.400 (10.16)	Y	-.300 (7.62)	-.125 (3.18)
G	+.000 (0.00)	-.450 (11.43)	Z	-.325 (8.26)	+.025 (0.64)
H	-.200 (5.08)	-.400 (10.16)	a	-.250 (6.35)	+.175 (4.45)
J	-.375 (9.53)	-.275 (6.99)	b	-.150 (3.81)	+.300 (7.62)
K	-.450 (11.43)	-.075 (1.91)	c	+.100 (2.54)	+.150 (3.81)
L	-.425 (10.80)	+.150 (3.81)	d	+.150 (3.81)	+.000 (0.00)
M	-.325 (8.26)	+.325 (8.26)	e	+.075 (1.91)	-.150 (3.81)
N	-.100 (2.54)	+.450 (11.43)	f	-.075 (1.91)	-.150 (3.81)
P	+.000 (0.00)	+.325 (8.26)	g	-.150 (3.81)	+.000 (0.00)
R	+.150 (3.81)	+.300 (7.62)	h	-.100 (2.54)	+.150 (3.81)
S	+.250 (6.35)	+.175 (4.45)	J	+.000 (0.00)	+.000 (0.00)

Shell size	Arrangement no.	Number of contacts	Size contacts	Service rating	Contact location	Supersedes
23	-32	32	20	I	All	MS20056-32

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D123W32BN

ISS	DATE	Latest modification - by	MOD N°
A	26-09-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Inline plug 8D series

SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D123W32BN-C | SHEET 2/2