

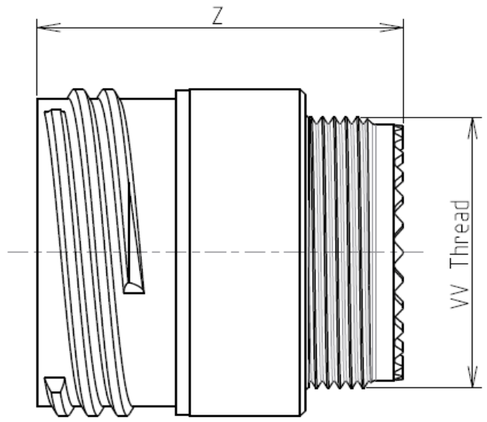


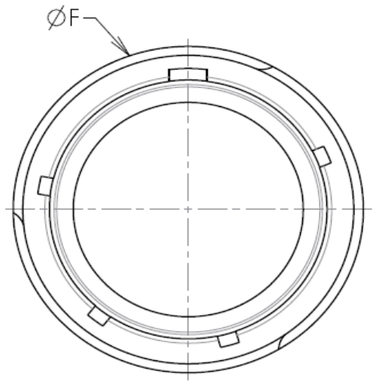

Keying Shown as example

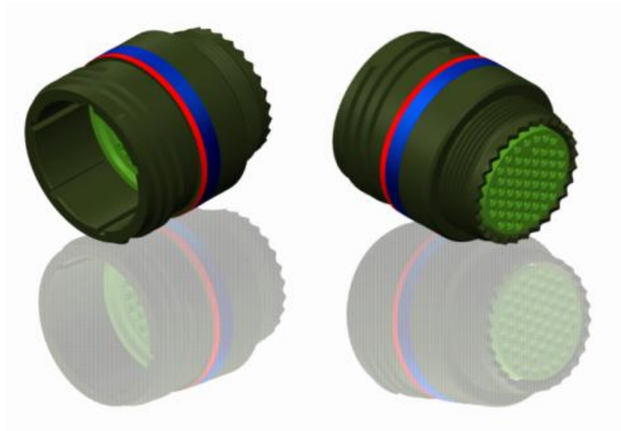

LAYOUT SHOWN AS EXAMPLE

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III
-Shell Material : Aluminium
-Shell Plating : Olive drab Cadmium
-Insulator : Thermoplastic
-Contacts : Copper Alloy
-Seals & Grommet : Silicon Elastomer
-Contact Plating : Gold over copper Alloy 0.8µm minimum
-Durability : 500 Mating cycles
-Delivered with Souriau contacts and Accessories
-Temperature Range : -65°C to +175°C
-Salt Spray : 500 hours

Connector dimension	
Dim	**Nominal**
F	41.3 Max
Z	31.5 Max
VV THREAD	M37x1-6g

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D125W08PE

A	22-09-2016	First Release	
ISS	DATE	Latest modification - by	MOD N°

Designed By: Date: **CUSTOMER DRAWING**


TITLE Aluminium Inline plug 8D series

SCALE NA		General linear Tolerances: ±--	NPRDS / PROJECT **859**
SOURIAU	WWW.SOURIAU.COM	This document is the property of SOURIAU it must not be reproduced or communicated without permission	
FORMAT A3	SOURIAU DRG N° 8D125W08PE-C		SHEET 1/2

BASIC SERIES:	8D	1	-	25	W	08	P	E
SHELL TYPE : In line Receptacle								
CONTACT TYPE : Standard Crimp Contact								
SHELL SIZE : 25								
PLATING : W = Olive drab Cadmium								

ORIENTATION : E
CONTACT TYPE : PIN(500 Matings)
CONTACT LAYOUT : 25-08

Contact Layout



(Inactive for new design for MIL-DTL-38999. For new design, use arrangement no. 25-10.)

Contacts (Insert arrangement 25-8)		
Contact position ID	Contact location	
	X-axis (mm)	Y-axis (mm)
A	+.000 (0.00)	+.426 (10.82)
B	+.333 (8.46)	+.266 (6.76)
C	+.415 (10.54)	-.095 (2.41)
D	+.185 (4.70)	-.384 (9.75)
E	-.185 (4.70)	-.384 (9.75)
F	-.415 (10.54)	-.095 (2.41)
G	-.333 (8.46)	+.266 (6.76)
H	+.000 (0.00)	+.000 (0.00)

Shell size	Arrange-ment no.	Number of contacts	Size contacts	Service rating	Contact location	Standard contact	
						Pin	Socket
25	-8	8	8	Twinax	All	M39029/90-529	M39029/91-530

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D125W08PE

ISS	DATE	Latest modification - by	MOD N°
A	22-09-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Inline plug 8D series

SCALE NA

General linear Tolerances: ±--

NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3

SOURIAU DRG N° 8D125W08PE-C