

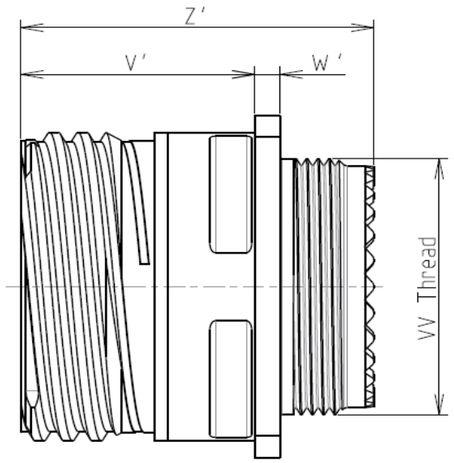


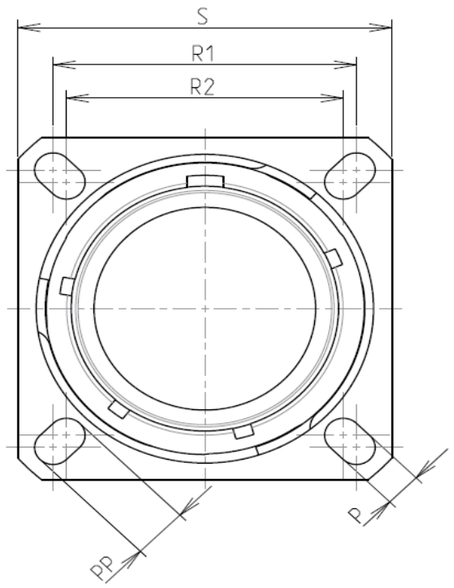

Keying Shown as example

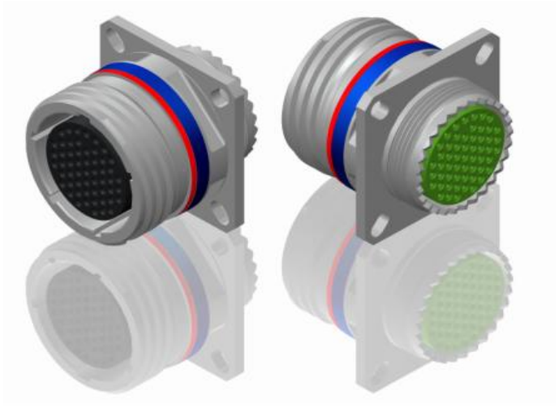

LAYOUT SHOWN AS EXAMPLE

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III
-Shell Material : Composite
-Shell Plating : Nickel
-Insulator : Thermoplastic
-Contacts : Copper Alloy
-Seals & Grommet : Silicon Elastomer
-Contact Plating : Gold over copper Alloy 0.8µm minimum
-Durability : 500 Mating cycles
-Delivered without Souriau contacts
-Temperature Range : -65°C to +200°C
-Salt Spray : 2000 hours
-Mass : 15.4 g ± 10%

Connector dimension	
Dim	**Nominal**
P	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
VV THREAD	M18x1-6g

BASIC SERIES:	8D	0	-	13	M	26	S	N	L
SHELL TYPE : Square Flange Receptacle									Delivered W/O Contacts
CONTACT TYPE : Standard Crimp Contact									ORIENTATION : N
SHELL SIZE : 13									CONTACT TYPE : SOCKET(500 Matings)
PLATING : M = Nickel									CONTACT LAYOUT : 13-26

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D013M26SNL

ISS	DATE	Latest modification - by	MOD N°
A	15-10-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Composite Receptacle 8D series

SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU | WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D013M26SNL-C | SHEET 1/2

Contact Layout

26




2#12
6#22D


13-26		
Ctc	X	Y
A	0	3.47
B	2.47	4.34
C	2.47	-4.34
D	0	-3.47
E	-2.47	-4.34
F	-2.47	4.34
1	3.25	0
2	-3.25	0

Panel Cutout

SQUARE FLANGE RECEPTACLE (TYPE 0)
REAR MOUNTING

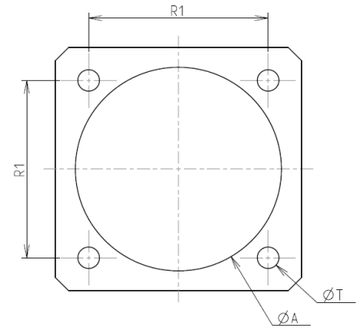

SQUARE FLANGE RECEPTACLE (TYPE 0)
FRONT MOUNTING

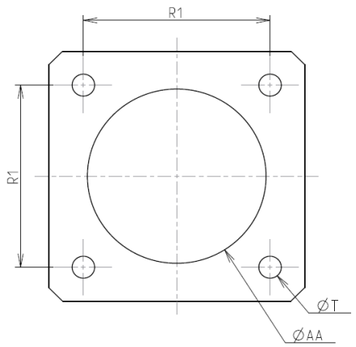

Dim	Nominal
ØA	23.42 min
ØAA	19.05 min
R1	23.01
ØT	3.25 ±0.13

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D013M26SNL

ISS	DATE	Latest modification - by	MOD N°
A	15-10-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Composite Receptacle 8D series

SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D013M26SNL-C | SHEET 2/2