

PRODUCT NUMBER

10072354-X01-XXXLF

PLATING

S = 0.38µm GOLD/GXT ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL
OVER 1.27µm MIN NICKEL

G = 0.76µm GOLD/GXT ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL
OVER 1.27µm MIN NICKEL

F = GOLD FASH ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL
OVER 1.27µm MIN NICKEL

RoHS COMPATIBLE
NOTE 6

PACKAGING
NOTE 5

TOTAL NB OF POSITIONS
04 TO 50 POS

COLOR OPTION NOTE 1

NOTES:

- MATERIAL HOUSING: HIGH TEMP. THERMOPLASTIC UL-94V0
- = STANDARD COLOR CREAM
B = OPTIONAL COLOR BLACK
- MATERIAL TERMINAL: COPPER ALLOY
- TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS PER ROW.
- 7N MIN PIN RETENTION IN EITHER DIRECTION.
- PACKAGING :
= PLASTIC BOX
U = TUBE AVAILABLE FROM 06 TO 50 POS
- RoHS COMPATIBLE PRODUCT SPECIFICATIONS

a - PLATING

= "LF" MEANS THE PRODUCT IS LEAD-FREE
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.



b - MANUFACTURING PROCESS COMPATIBILITY

- THE HOUSING WITHSTAND EXPOSURE TO
260°C PEAK TEMPERATURE FOR
30 SECONDS MAX IN A CONVECTION, INRA-RED
OR VAPOR PHASE OR REFLOW OVEN.




c - LABELLING:

- MEETS PACKAGING SPECS AS PER GS-14-920.

d - THIS PRODUCT MEETS EUROPEAN DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DISCRIBED IN GS-22-008

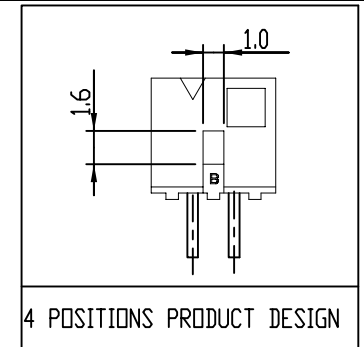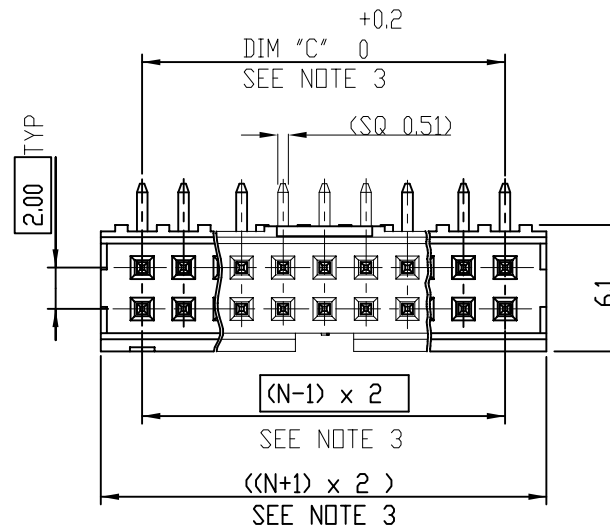

INDICATES POS 1

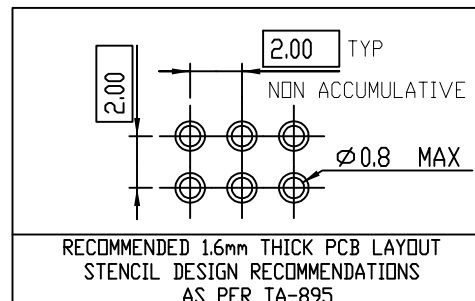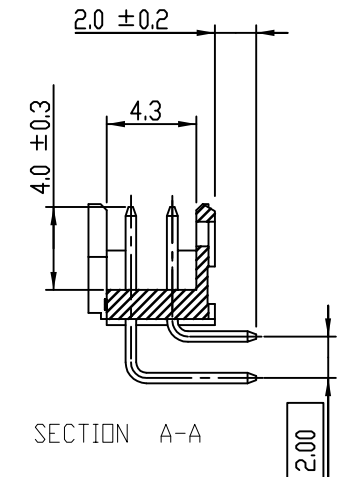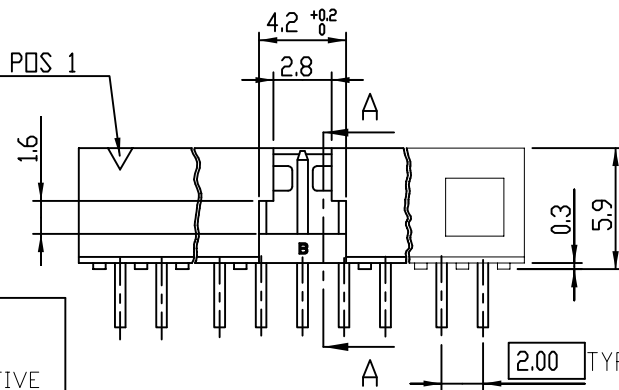

rev	ecn no	dr	date
A	F07-0105	LMU	07.01.10
B	F08-0113	LMU	08.01.17
C	F08-0145	ELA	15.04.08
D	F10-0013	GPE	23.02.10
E	F11-0303	LMU	12.09.11
-	-	-	-
-	-	-	-

www.fciconnect.com		surface -	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101	ISO 1101	
		TOLERANCES UNLESS OTHERWISE SPECIFIED		size	Scale
Dr	L MULIN	06.09.14	ANGULAR	0.X	± 0.13
Eng	J COMPAGNON	06.09.14	LINEAR	0.XX	± 0.05
Chr	-	-	0° ± 2°	0.XXX	±
Appr	J.M.C	06.09.14	Product family		Minitek
				Spec ref	-
FCI		title		dwg no	Rev.
		SHR HEADER		10072354	E
		2.00 RIGHT ANGLE PIP			
		catalog no		CUSTOMER Drawing	
				sheet 1 of 1	