

Fig. 1

- Series 4XX sockets are available with straight and right angle solder tails.
- Series 450 & 499...009 use MM# 3404 & 5011/5113 pins respectively. (See pages 170 & 172 for details)
- Series 410 & 499...003 use MM# 1001 & 1103/1602 pins respectively. (See pages 134-136 for details)
- Hi-Temp thermoplastic insulator available upon request.



Ordering Information

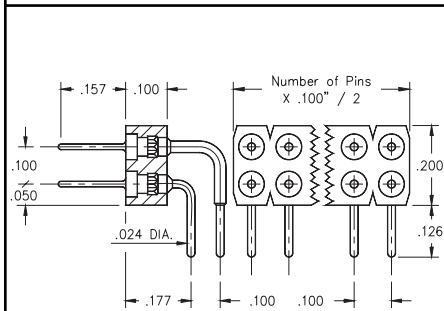


Fig. 2

Fig. 1	Series 450...006	Straight Pin Header
	450-XX-2__-00-006000	Specify # of pins → 02-64
Fig. 2	Series 499...009	Right Angle Pin Header
	499-XX-2__-10-009000	Specify # of pins → 02-64

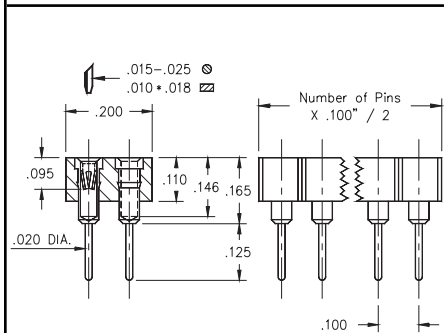


Fig. 3

RoHS 2002/95/EC **XX= Plating Code See Below**

For RoHS compliance, select \diamond plating code. For the gold option (XX=10) also change part number from 4XX-XX-2XX-XX-00X000 to 4XX-10-2XX-XX-00X100

SPECIFY PLATING CODE XX=	10 \diamond	90	40 \diamond	
Pin Plating	10μm Au	200μm Sn/Pb	200μm Sn	

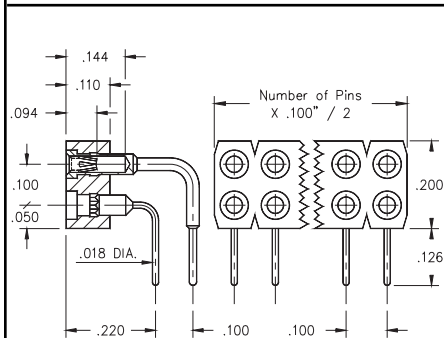


Fig. 4

Fig. 3	Series 410...001	Straight Socket
	410-XX-2__-41-001000	Specify # of pins → 02-64
Fig. 4	Series 499...003	Right Angle Socket
	499-XX-2__-10-003000	Specify # of pins → 02-64

RoHS 2002/95/EC **XX= Plating Code See Below**

For RoHS compliance, select \diamond plating code. For the all gold option (XX=13) also change part number from 4XX-XX-2XX-XX-00X000 to 4XX-13-2XX-XX-00X100

SPECIFY PLATING CODE XX=	13 \diamond	93	43 \diamond	
Sleeve (Pin)	10μm Au	200μm Sn/Pb	200μm Sn	
Contact (Clip)	30μm Au	30μm Au	30μm Au	